

PVC PROFILE

PRODUCT CATALOGUE



PRO5003



PRO6003



PRO6004



PRO7005



PRO8106



PROSLIDE60



PROSLIDE70



PROSLIDE84



INSULATED SLIDING

PRO-5003

50 MM, 3 CHAMBERS

Product Description

Allows your area to get more light, makes room more bright.
Especially designed for use in narrow walls or containers.
Good appearance with round corner design, looks smooth and peaceful.
Easy to install with less weight, easy to move and installation.
It saves but not loss any function.

1. 50mm profile width
2. 3 Chambered system which improves insulation and durability
3. Decorative glazing bead with PCE gasket
4. External wall with 45° chamfer which prevents dust and dirt, provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standards
7. Between 4mm - 22mm glass application possibility
8. One-type reinforcement steel
9. One-type seal
10. Unlimited lamination color option



Lamination Colors


For more color, please contact with us!




Certificates

All products are under quality management system




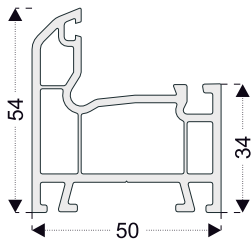


PRO531
Frame Profile

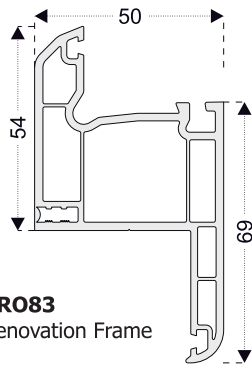


PRO83
Renovation Frame

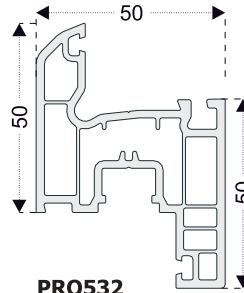


PRO532
Sash Profile

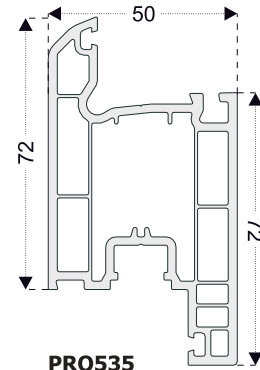


PRO535
Inward Door Profile

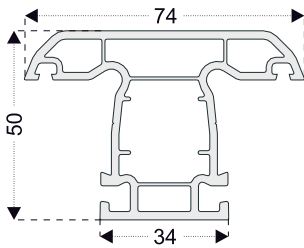

PRO533
Mullion Profile

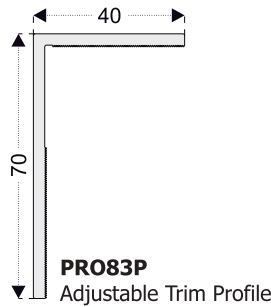

PRO83P
Adjustable Trim Profile




PRO500
4-6 mm Single Glass G.Bead




PRO703
20-22 mm Double Glass G.Bead


SECTION DETAILS

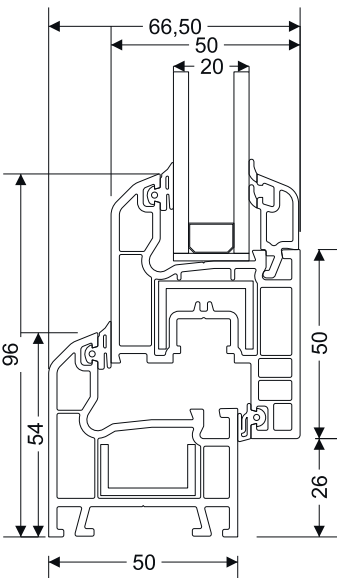


Frame - Sash
Connection Section

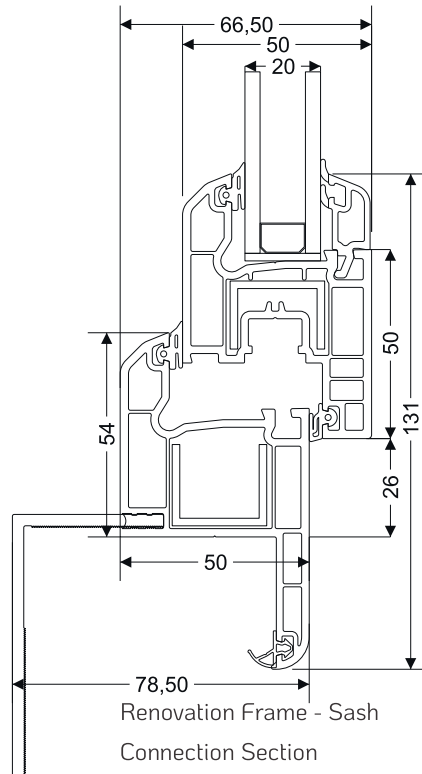

78,50
Renovation Frame - Sash
Connection Section

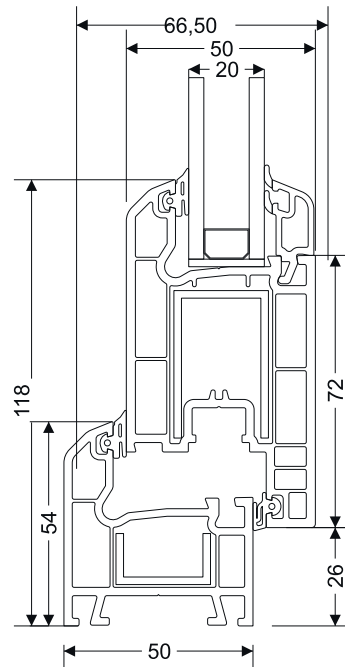

Frame - Inward Opening
Door Sash
Connection Section

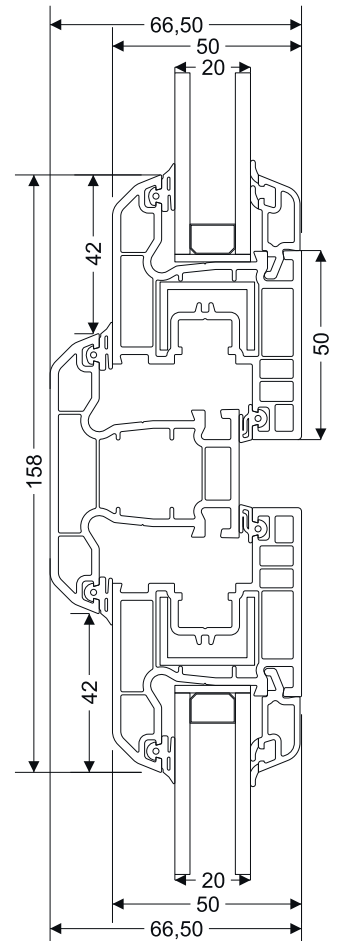

Sash - Mullion - Sash
Connection Section

PRO-6003

60 MM, 3 CHAMBERS

Product Description

It is offered as cost and performance product, meanwhile appeals to the eye with decorative looks and more elegant design than its peers. It adds value to your place. It has faultless and aesthetic desing that can cater to every taste with decorative and self-gasket glazing bead. Support aluminum threshold and many auxiliary profile, has functionality that you can use each project.

1. 60mm profile width
2. 3 Chambered system which improves insulation and durability
3. Decorative glazing bead with PCE gasket
4. External wall with 45° chamfer which prevents dust and dirt, provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standarts
7. Between 4mm - 30mm glass application possibility
8. One-type reinforcement steel
9. One-type seal
10. Unlimited lamination color option

Lamination Colors


For more color, please contact with us!




Certificates

All products are under quality management system




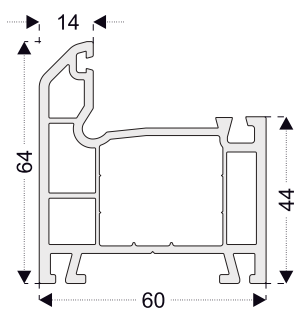


PRO51
Frame Profile

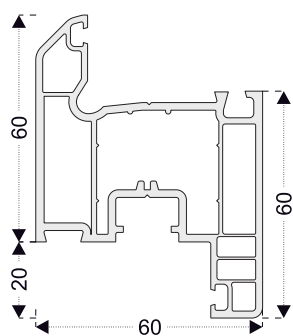


PRO52
Sash Profile

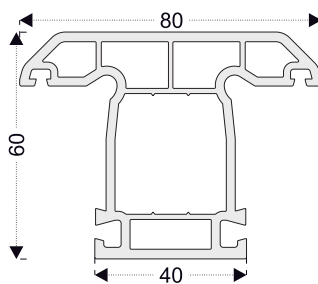


PRO53
Mullion Profile

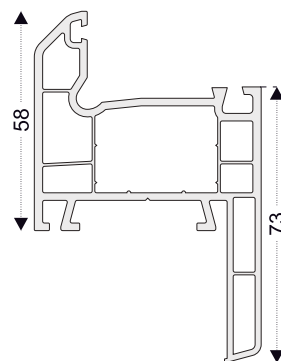


PRO81
Renovation Frame Prf.

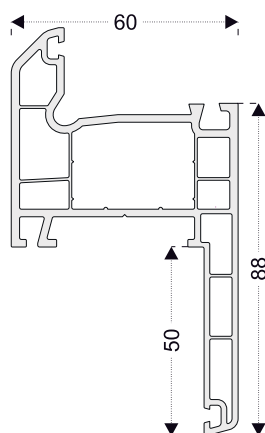


PRO82
Renovation Frame Prf.

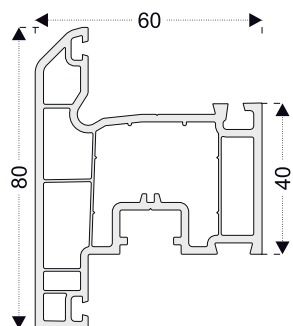


PRO521
Outward Sash Profile

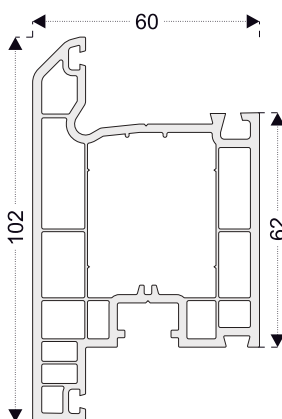


PRO10
Outward Door Profile

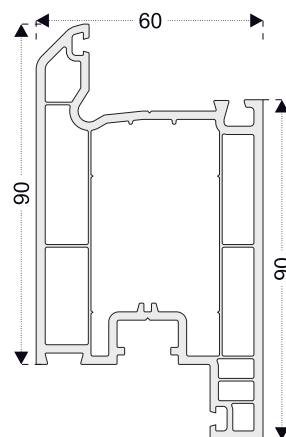


PRO04
Inward Door Profile

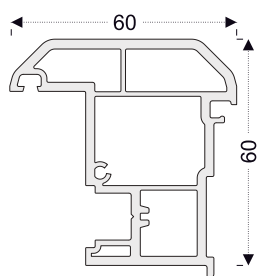

PRO12
French Casement Mullion Prf.

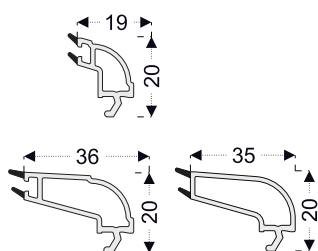

PRO05
20-22 mm Double Glass G.Bead

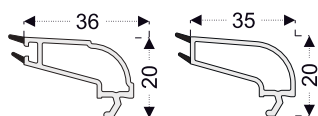


PRO06
4-6 mm Single Glass G.Bead




PRO07
28-30 mm Triple Glass G.Bead




PRO08
24-26 mm Double Glass G.Bead




PRO08-1
24-26 mm Double Glass G.Bead




PRO09
8-10 mm Glazing Bead

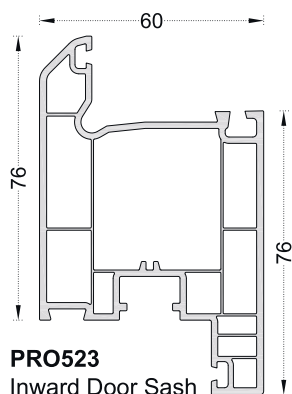


PRO523
Inward Door Sash

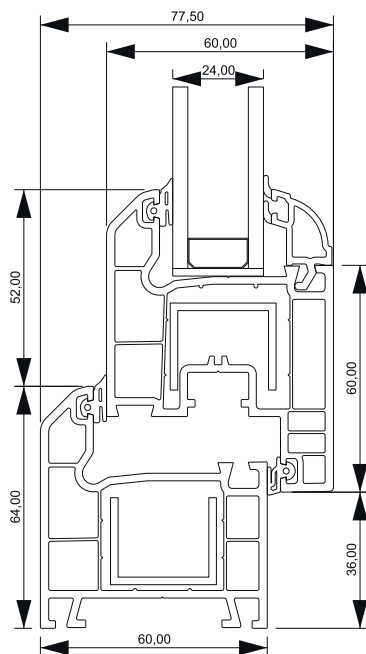

Frame - Sash
Connection Section

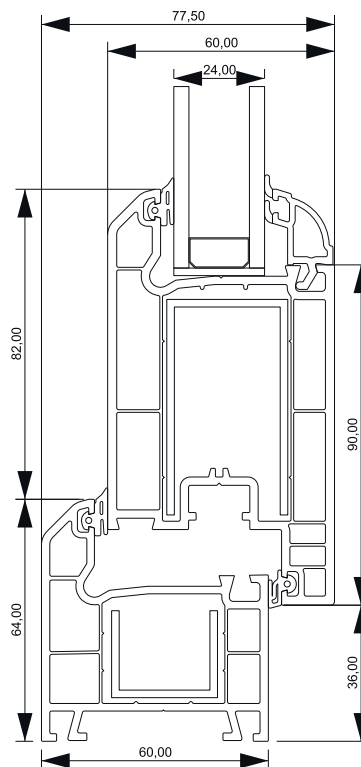

Frame - Inward Opening Door Sash
Connection Section

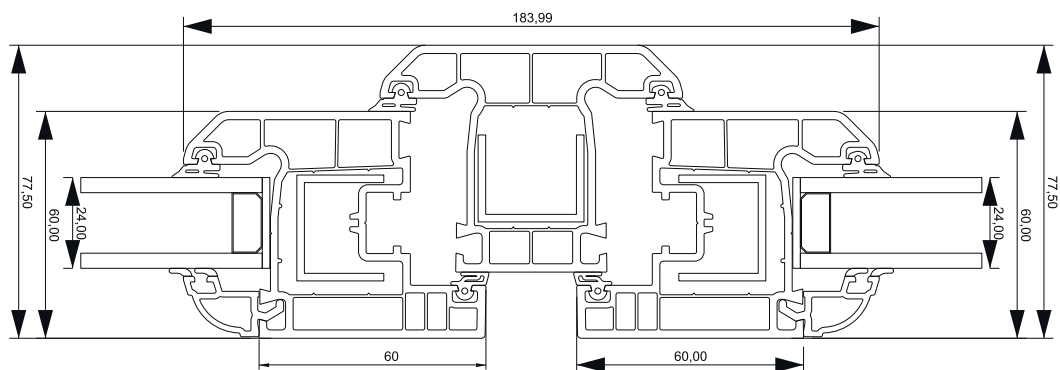

Sash - Mullion - Sash Connection Section

PRO-6004

60 MM, 4 CHAMBERS

Product Description

It is designed for more heat and sound insulation, meanwhile it has a decorative appearance and more elegant design than its counterparts. It adds value to your place. It has faultless and aesthetic desing that can cater to every taste with decorative and self-gasket glazing bead. Support aluminum threshold and many auxiliary profile, has functionality that you can use each project.

1. 60mm profile width
2. 4 Chambered system which improves insulation and durability
3. Decorative glazing bead with PCE gasket
4. External wall with 45° chamfer which prevents dust and dirt, provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standards
7. Between 4mm - 30mm glass application possibility
8. One-type reinforcement steel
9. One-type seal
10. Unlimited lamination color option

Lamination Colors

For more color, please contact with us!



Certificates


All products are under quality management system




PRO-6004

60 MM
4 CHAMBER




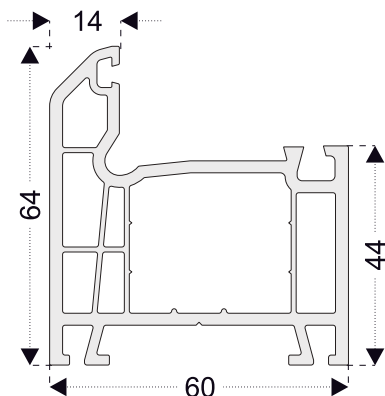


PRO01
Frame Profile

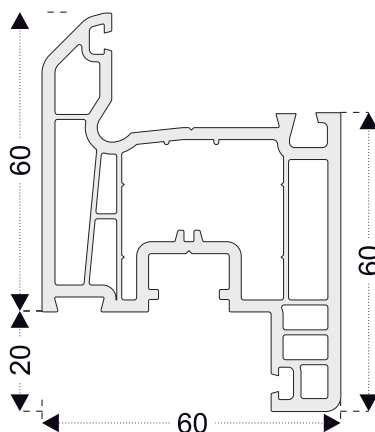


PRO02
Sash Profile

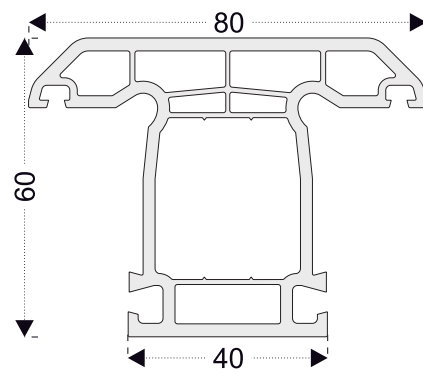


PRO03
Mullion Profile

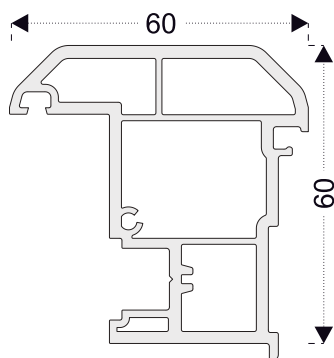


PRO12
French Casement Mullion Prf.

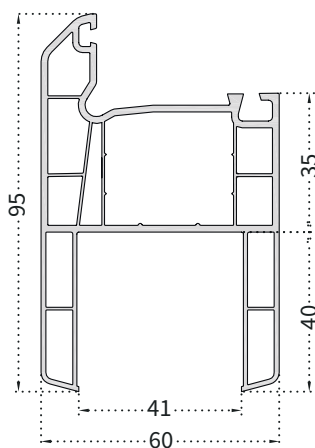


PRO15
6004 Container Frame Profile

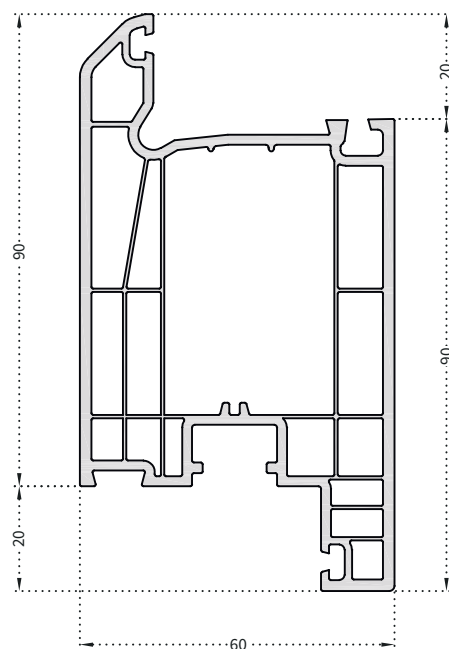

PRO17
6004 Door Sash




PRO05
20-22 mm Double Glass G.Bead

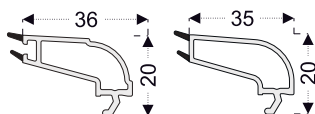


PRO06
4-6 mm Single Glass G.Bead




PRO07
28-30 mm Triple Glass G.Bead




PRO08
24-26 mm Double Glass G.Bead




PRO08-1
24-26 mm Double Glass G.Bead




PRO09
8-10 mm Glazing Bead

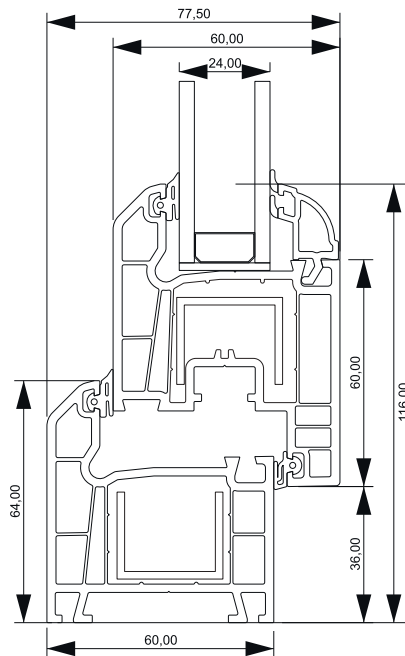

Frame - Sash
Connection Section

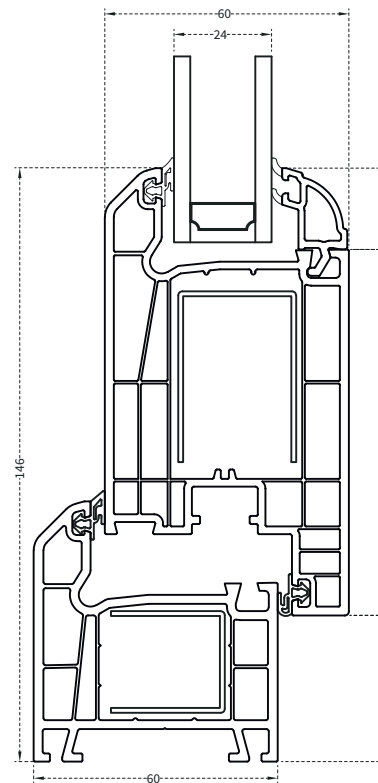

Frame - Inward Opening Door Sash
Connection Section

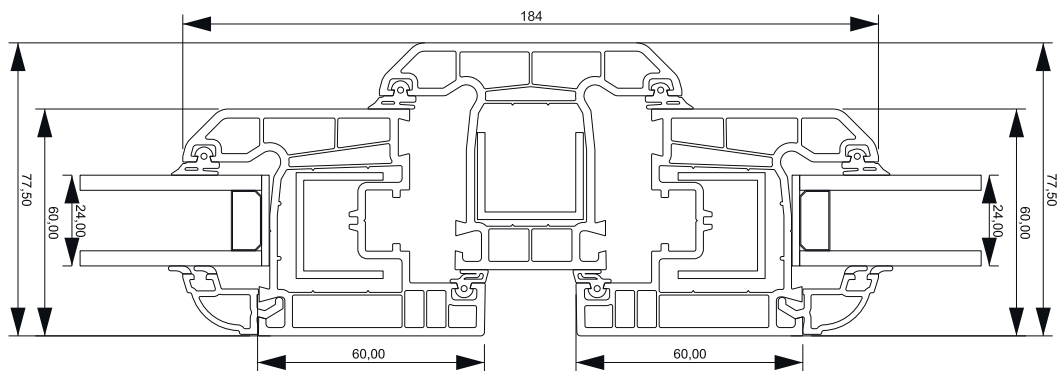

Sash - Mullion - Sash Connection Section

PRO-7005

70 MM, 5 CHAMBERS

Product Description

It is designed for high-rise buildings or projects where heat and sound insulation is important, meanwhile it has a decorative appearance and more elegant design than its counterparts. It adds value to your place. It has faultless and aesthetic desing that can cater to every taste with decorative and self-gasket glazing bead.

1. 70mm profile width
2. 5 Chambered system which improves insulation and durability
3. Decorative glazing bead with PCE gasket
4. External wall with 45° chamfer which prevents dust and dirt, provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standarts
7. Between 4mm - 36mm glass application possibility
8. One-type reinforcement steel
9. One-type seal
10. Unlimited lamination color option

Lamination Colors

For more color, please contact with us!



Certificates


All products are under quality management system




PRO-7006

70 MM, 6 CHAMBERS WITH STANDARD AND DRAIN SASH OPTIONS




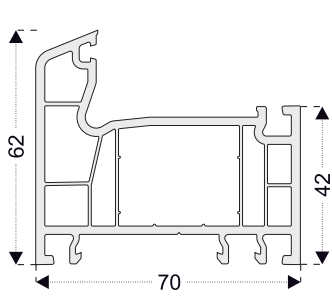


PRO711
Frame Profile - 42mm

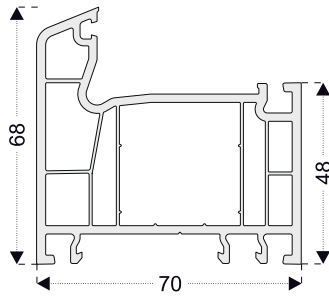


PRO710
Frame Profile - 48mm

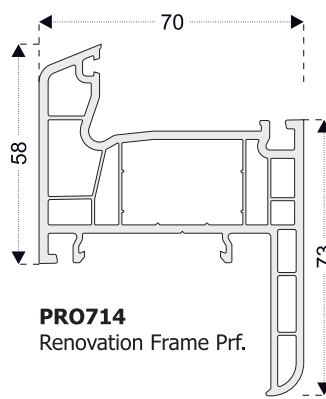


PRO714
Renovation Frame Prf.

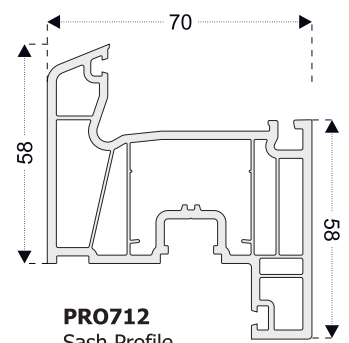


PRO712
Sash Profile

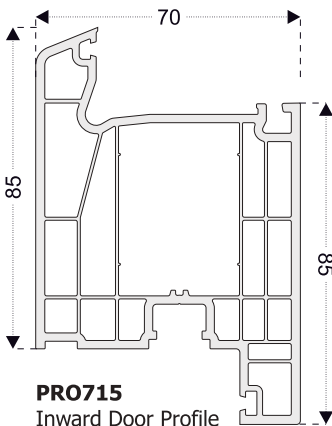


PRO715
Inward Door Profile

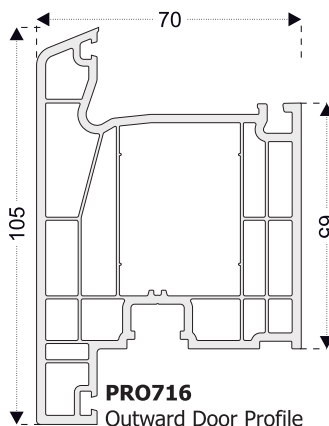


PRO716
Outward Door Profile

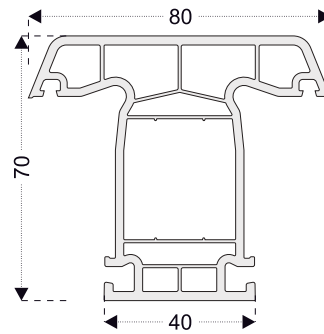


PRO713
Mullion Profile

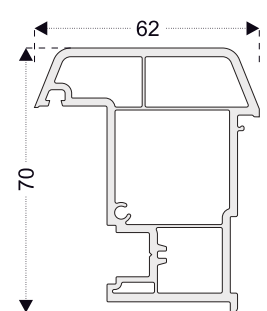


PRO717
French Casement Mullion Prf.

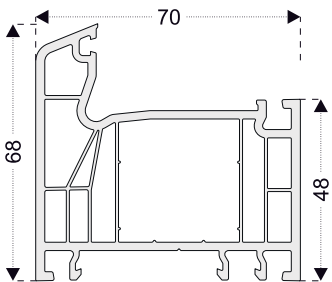


PRO720
Frame Profile (6 Chambers)

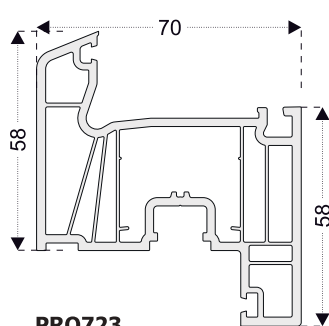


PRO723
Sash Profile (6 Chambers)

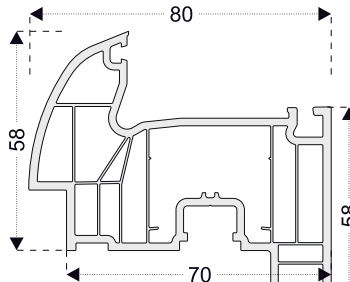


PRO724
Drain Sash Profile (7 Chambers)

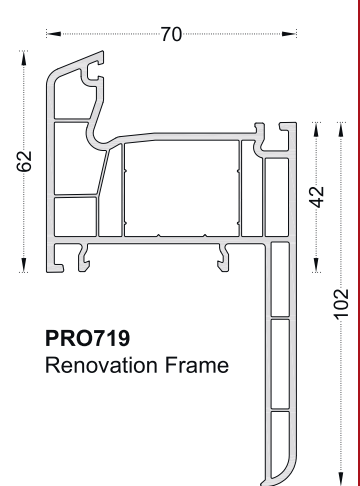


PRO719
Renovation Frame

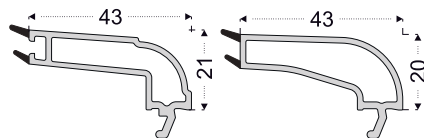

PRO700
4-6 mm Single Glass G.Bead

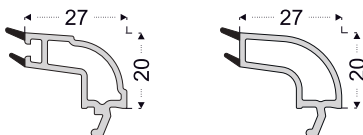


PRO701
20-22 mm Double Glass G.Bead

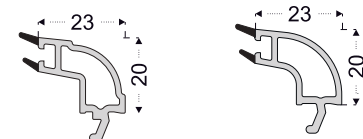


PRO702
24-26 mm Double Glass G.Bead




PRO705
32 mm Double Glass G.Bead



PRO706
32 mm Double Glass G.Bead

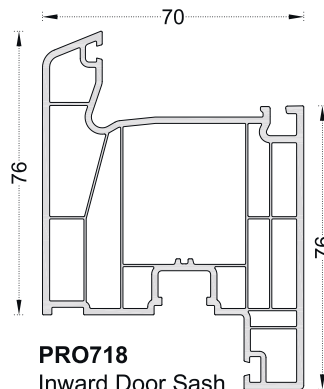


PRO718
Inward Door Sash

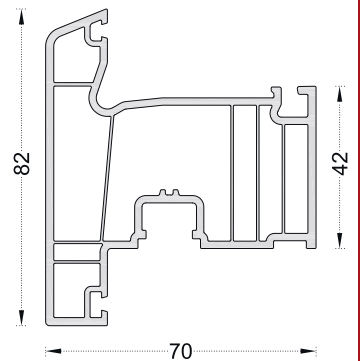


PRO722
Outward Sash

PRO-7005


SECTION DETAILS

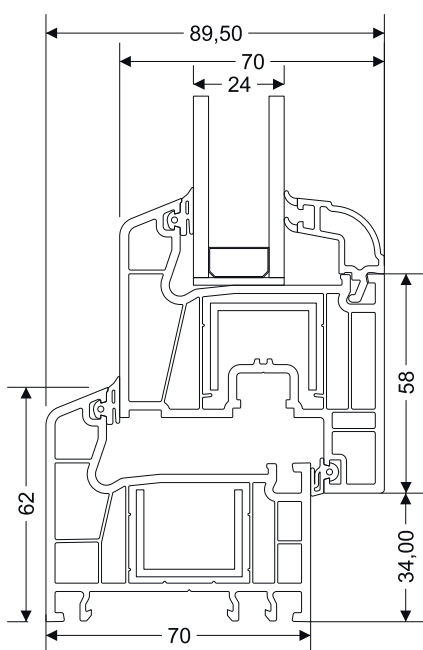


Frame 42mm - Sash
Connection Section

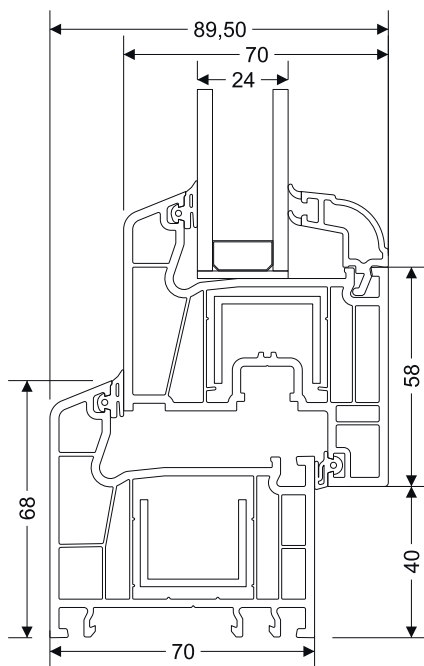


Frame 48mm - Sash
Connection Section

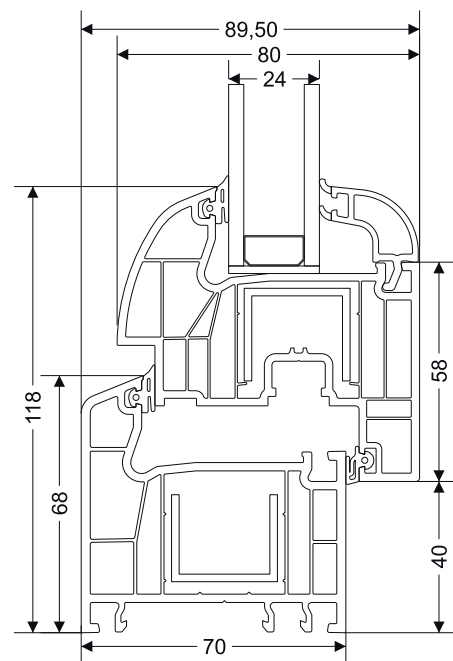


Frame - Drain Sash
Connection Section

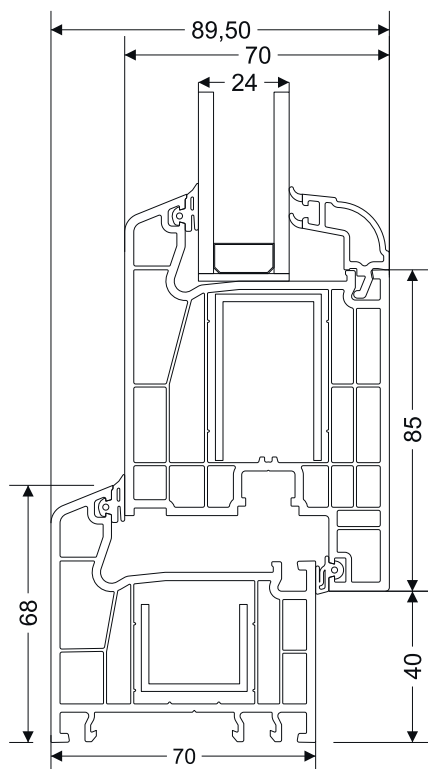

Frame - Inward Door Sash
Connection Section

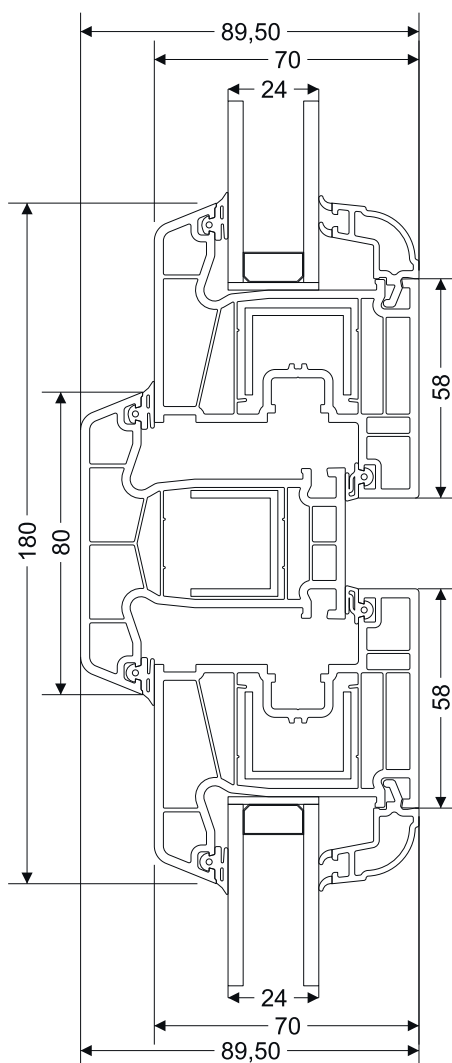

Sash - Mullion - Sash
Connection Section

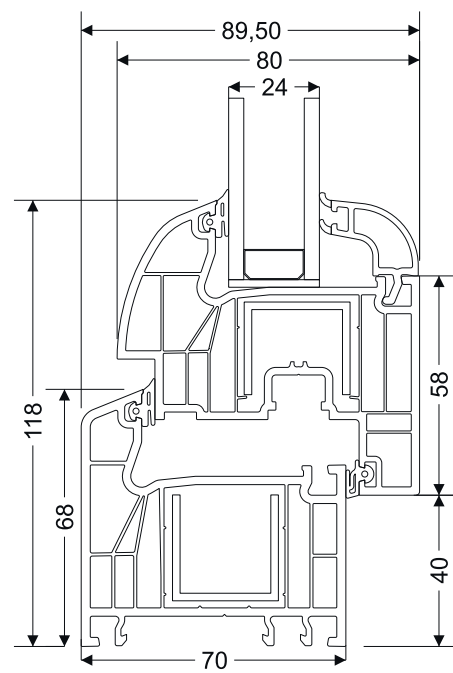

PRO7006
Frame (6 Chambers) - Drain Sash
Connection Section

PRO-8106

81 MM, 6 CHAMBERS

Product Description

The well-considered design and geometry that combined with latest technologies to obtain excellent statics, long-term window function retention and hassle-free operation. PRO8106 series window system has innovative multi-chamber geometry and supply excellent thermal insulation, silence, security and unique aesthetics. That serie is a combination of state-of-the-art technical solutions to ensure above-average properties.

1. 81mm profile width
2. 6 Chambered system which improves insulation and durability
3. Decorative glazing bead with PCE gasket
4. External wall with 45° chamfer which prevents dust and dirt, provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standards
7. Between 24mm - 32mm glass application possibility
8. One-type reinforcement steel
9. One-type seal
10. Unlimited lamination color option

Lamination Colors

For more color, please contact with us!



Certificates


All products are under quality management system




PRO-8106

81 MM
6 CHAMBER




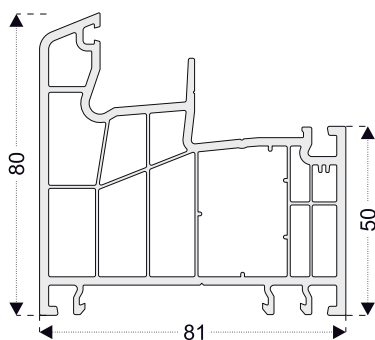


PRO8601
Frame Profile

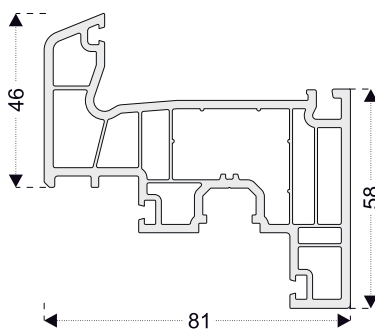


PRO8611
Sash Profile

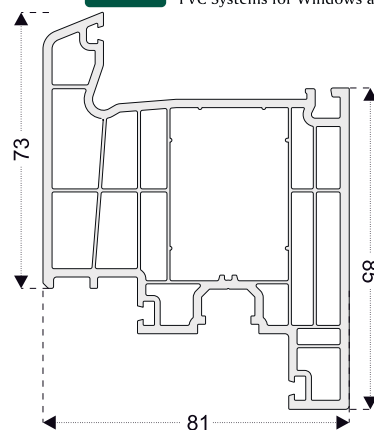


PRO8631
Inward Opening Door Profile

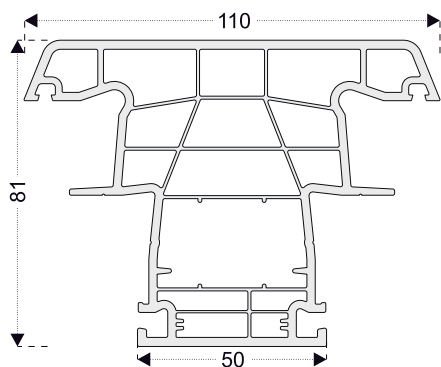


PRO8621
Mullion Profile

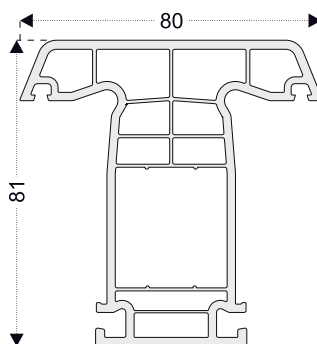


PRO8623
Mullion Profile

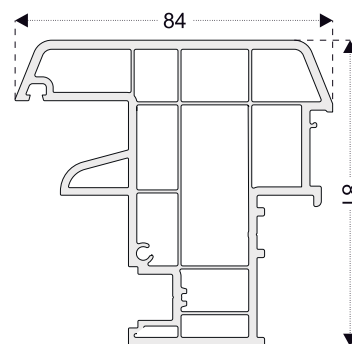


PRO8622
French Casement Mullion Profile




PRO8641
32mm Triple Glass Glazing Bead
for Sash Profiles
PRO8611, PRO8631




PRO8642
24mm Double Glass Glazing Bead
for Sash Profiles
PRO8611, PRO8631



PRO8643
32mm Triple Glass Glazing Bead
for Frame and Mullion Profiles
PRO8601, PRO8621





PRO8644
24mm Double Glass Glazing Bead
for Frame and Mullion Profiles
PRO81601, PRO8621




PRO8640
Glazing Bead
Adapter Profile


PRO8632
8106 Outward Door Sash

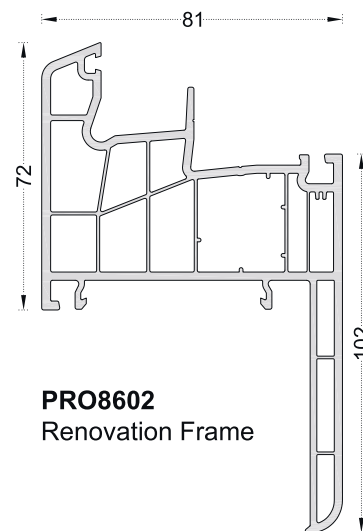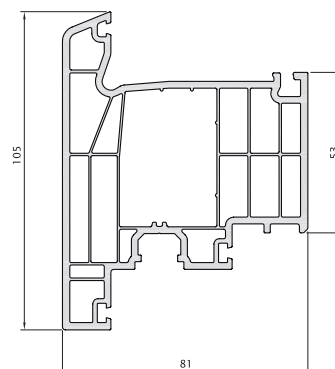


PRO8602
Renovation Frame

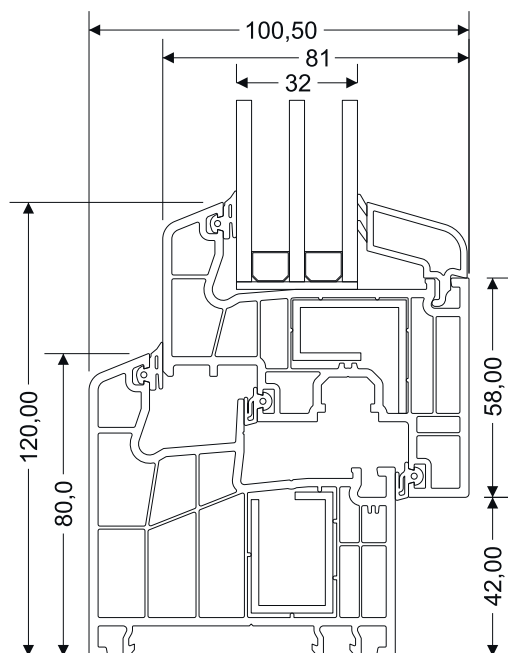


Frame - Sash Connection Section

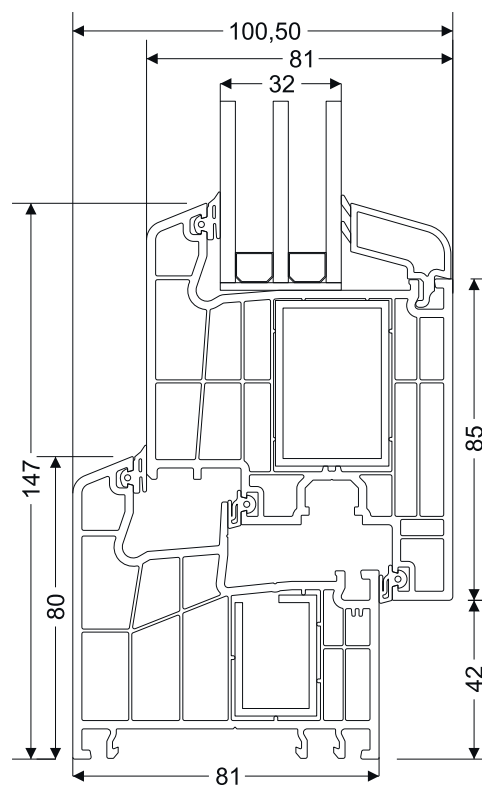

Frame - Inward Opening Door Sash
Connection Section

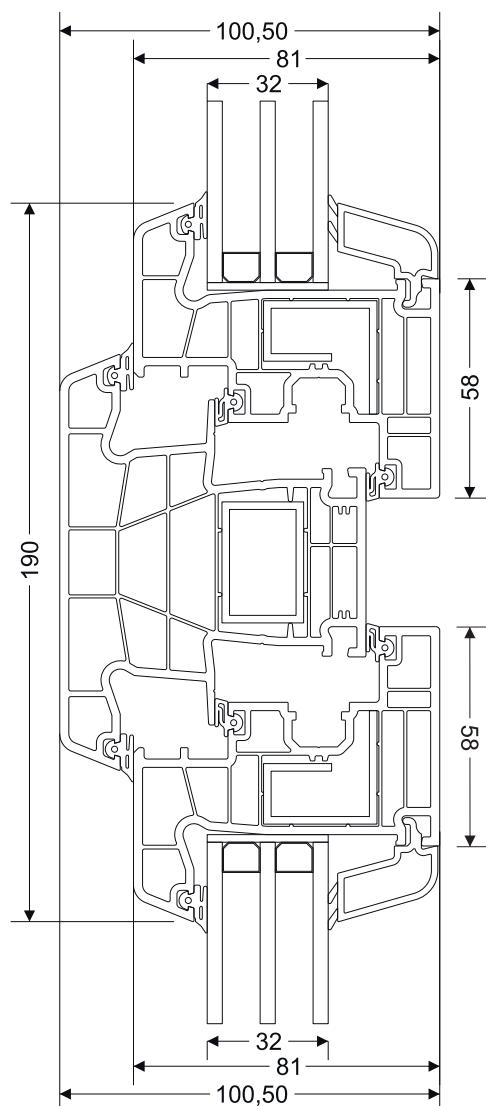

Sash - Mullion - Sash

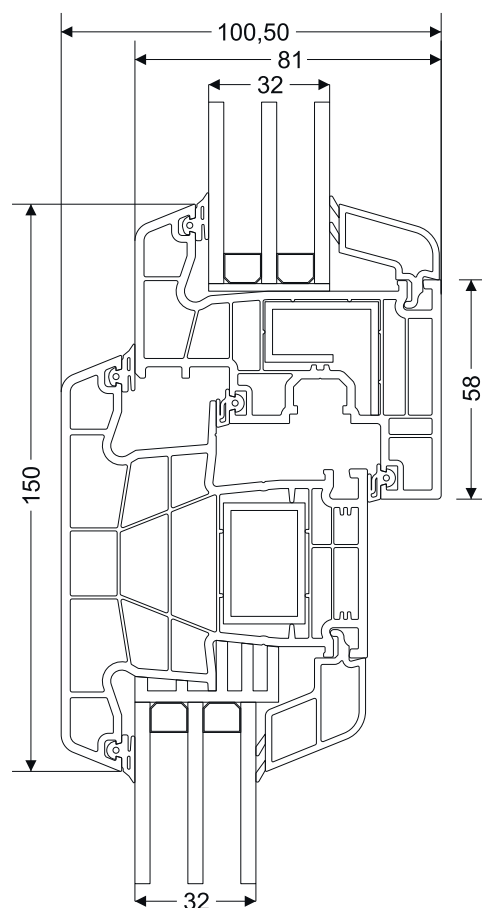

Mullion - Sash - Fix

PROSLIDE-60

60 MM


Product Description

Narrow frame and sash profiles provide a larger glass area, providing a better view of the outdoors. This is especially advantageous for places with views or in need of light. Sliding systems, on the other hand, increase usability in narrow spaces as they do not take up space when opening, thus saving space.

1. 60 mm profile width
2. Two type sash profile W: 38mm H:67 mm and W:38mm H:80mm
3. Inside and outside flynet application options.
4. decorative glazing bead with PCE gasket
5. Slope which provides maximum water disposal
6. External wall thickness in European Standards
7. Between 4 mm - 16 mm glass application possibility
8. Unlimited lamination color option

Lamination Colors


For more color, please contact with us!




Certificates

All products are under quality management system




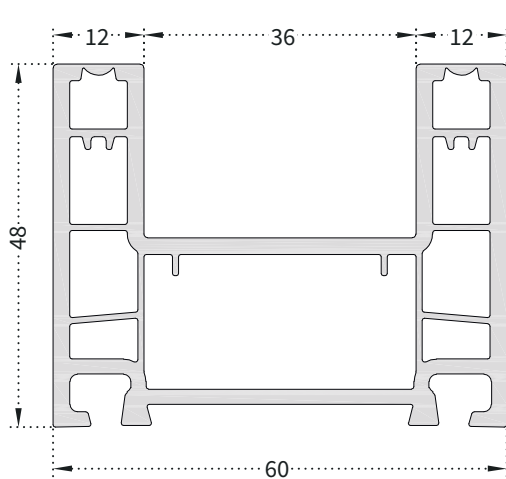


PRO600
60mm Sliding Frame

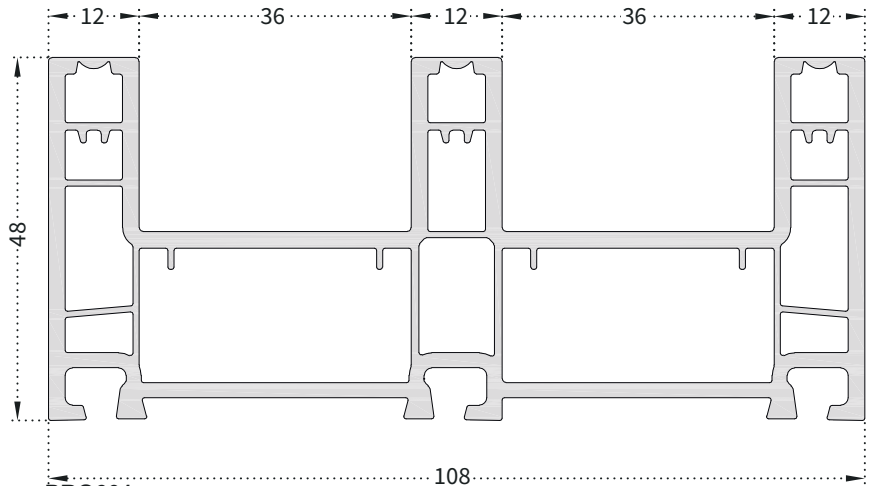


PRO601
60mm Triple Sliding Frame

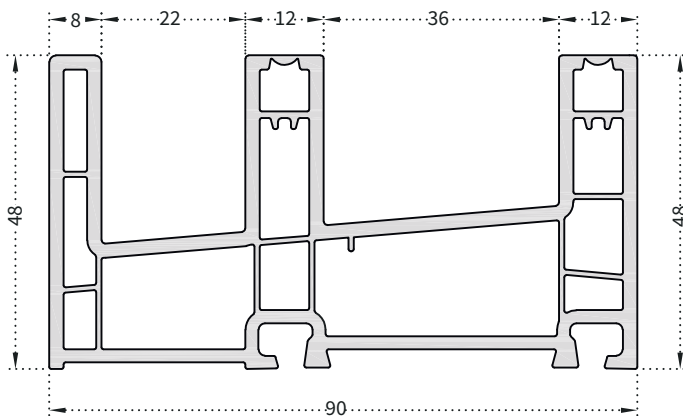


PRO602
60mm Sliding Frame With Flynet (Flynet Outside)

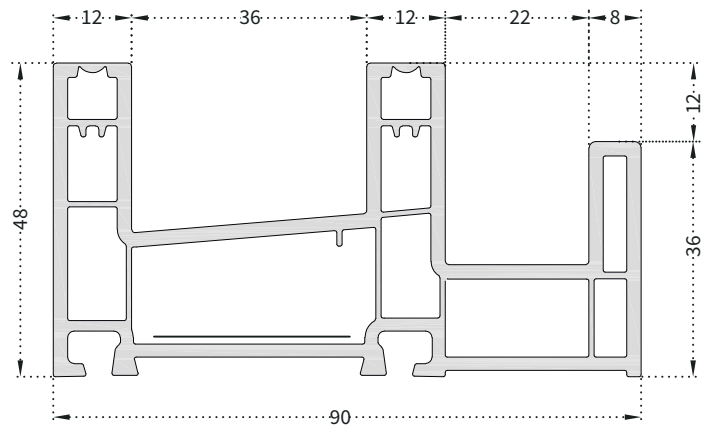


PRO603
60mm Sliding Frame With Flynet (Flynet Inside)

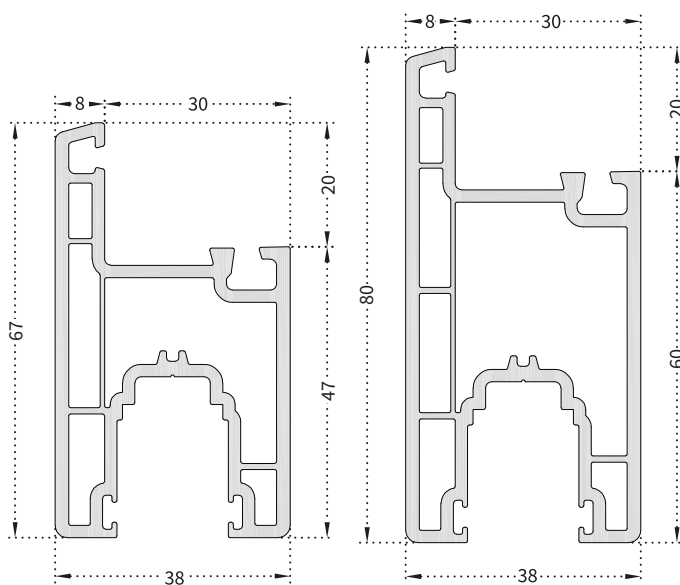


PRO604
60mm Sliding Sash (67 Mm)

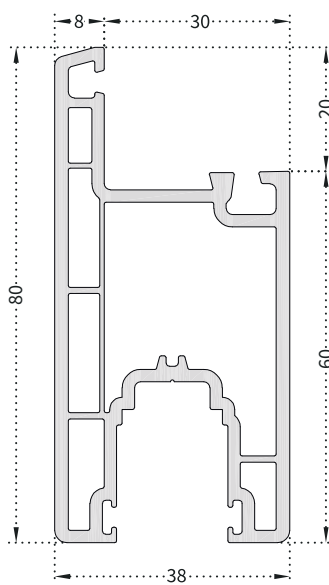


PRO605
60mm Sliding Sash (80 Mm)

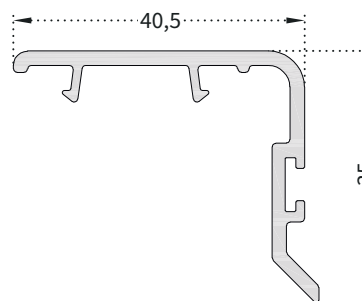


PRO606
60mm Sliding Sash Adapter

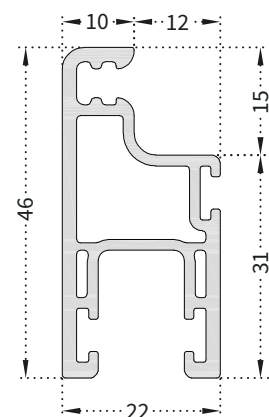


PRO607
60mm Sliding Flynet Sash



PRO05 60mm SÜRME / SLIDING
4mm Glazing Bead




PRO07 60mm SÜRME / SLIDING
12mm Glazing Bead




PRO704 60mm SÜRME / SLIDING
16mm Glazing Bead

PROSLIDE-60


SECTION DETAILS

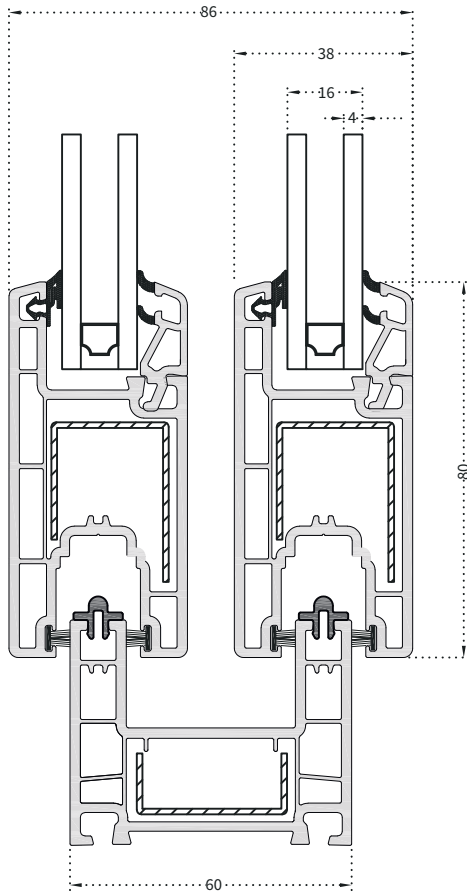


Double Sliding Frame - Sliding Sash 80 mm

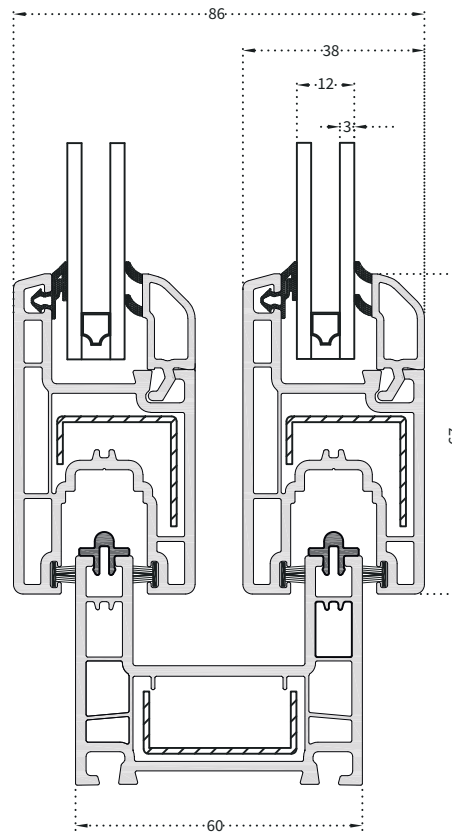

Double Sliding Frame - Sliding Sash 67 mm

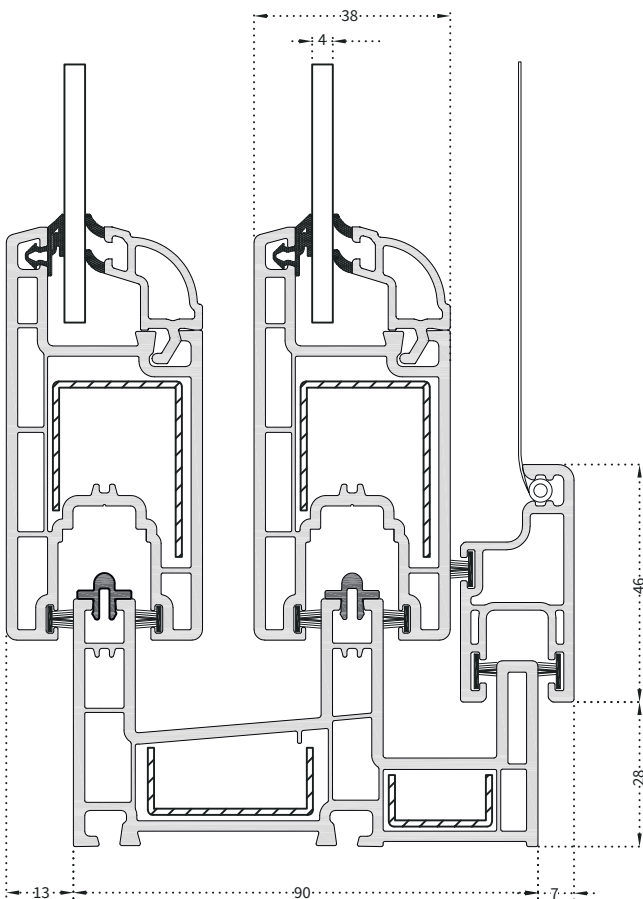

Double Sliding Frame - Sliding Sash with Inside Flynet

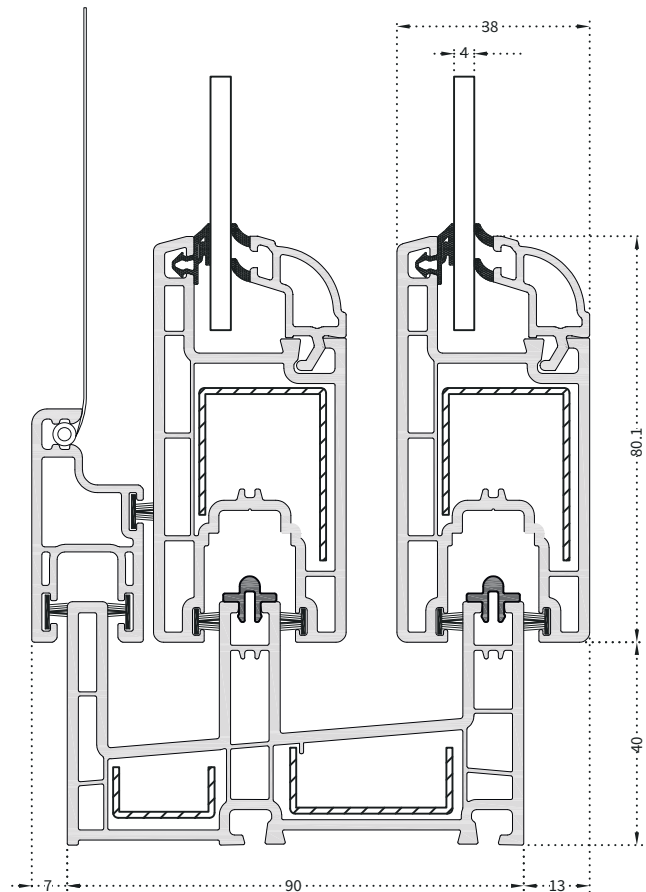

Double Sliding Frame - Sliding Sash with Outside Flynet

PROSLIDE-70

70 MM, 3 CHAMBERS


Product Description

It is designed to be used in projects which sliding window and door needed, meanwhile it has a decorative appearance and more elegant design than its counterparts. It adds value to your place. Through to the closed rail ducts, it remain clean for a long time. Produced with TPE gasket and self-gasket provides sealing with corner welds.

1. Two type sash profile W:48mm H:80mm and W:48mm H:100mm
2. 3 Chambered system which improves insulation and durability
3. Decorative glazing bead with PCE gasket
4. External wall with 45° chamfer which prevents dust and dirt, provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standards
7. Between 4mm - 22mm glass application possibility
8. One-type reinforcement steel
9. One-type seal
10. Unlimited lamination color option

Lamination Colors

For more color, please contact with us!



Certificates


All products are under quality management system




PROSLIDE-70

70 MM
3 CHAMBER




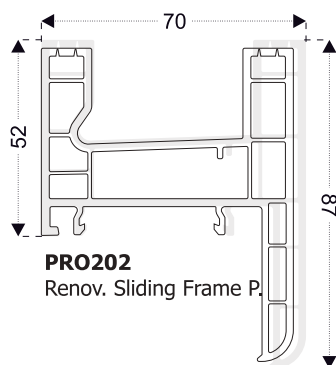


PRO202
Renov. Sliding Frame P.

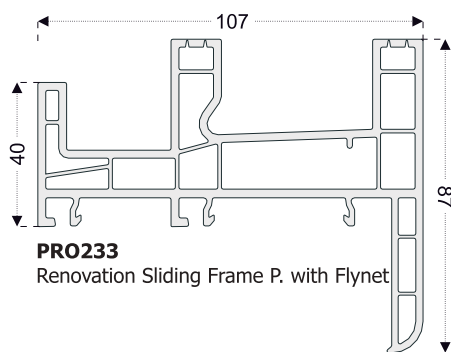


PRO233
Renovation Sliding Frame P. with Flynet

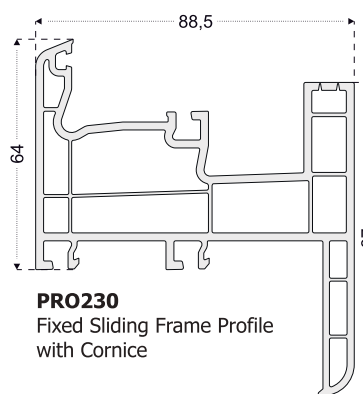


PRO230
Fixed Sliding Frame Profile with Cornice




PRO431
Fixed Sliding Frame Trim Profile (Alum.)

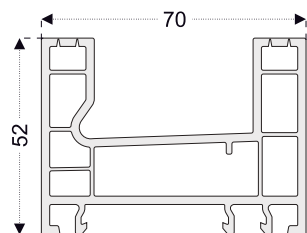


PRO201
Sliding Frame Profile

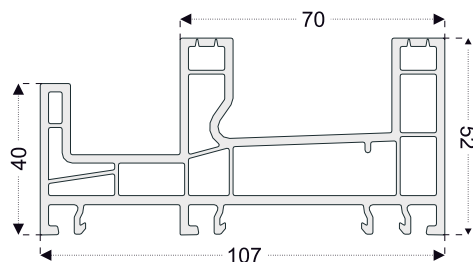


PRO232
Sliding Frame Profile with Flynet

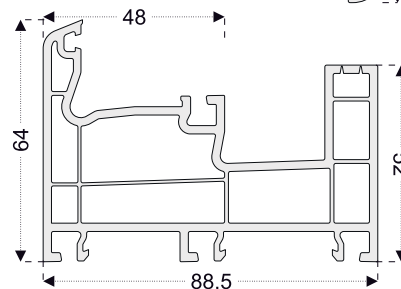


PRO231
Fixed Sliding Frame Profile




PRO411
Sliding Sash Profile Locking Plate (Alum.)

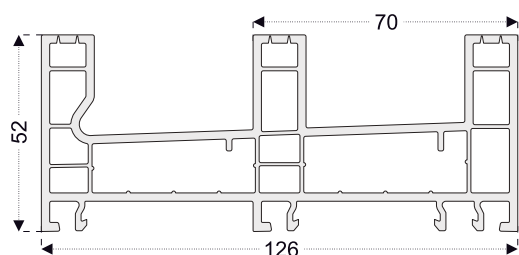


PRO2011
Triple Sliding Frame Profile

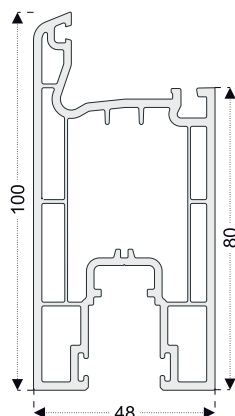


PRO213
Sliding Door Sash Profile

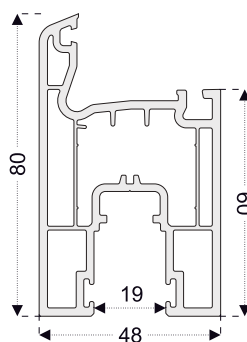


PRO211
Sliding Door Sash Profile

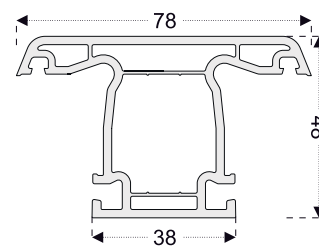


PRO212
Mullion Profile




PRO234
Sliding Flynet Sash Profile




PRO235
Flynet Mullion Profile



PRO205
Flynet Rail Profile

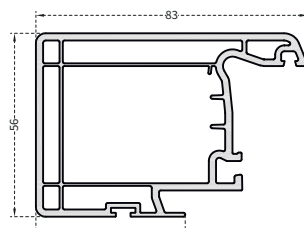


PRO215
70mm Fixed Sliding Mullion




PRO216
70mm Fixed Sliding Mullion Adapter




PRO271
Sliding Rail Profile (Alum.)




PRO204 ** for PRO211
Sliding Sash Profile Adapter




PRO214 ** for PRO213
Sliding Sash Profile Adapter




PRO231K
Fixed Sliding Frame Closing Profile

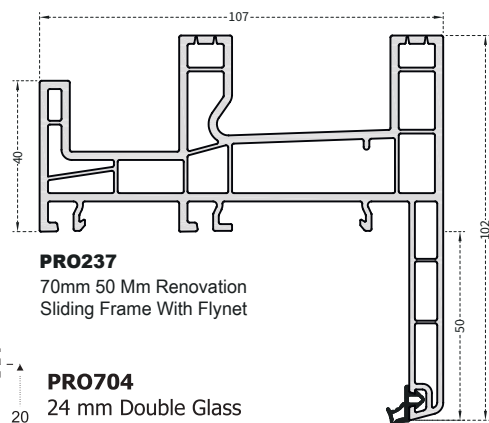

PRO237
70mm 50 Mm Renovation Sliding Frame With Flynet

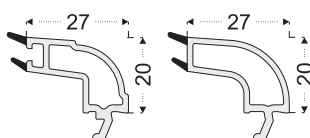


PRO701
4-6 mm Single Glass Glazing Bead




PRO703
20-22 mm Double Glass Glazing Bead




PRO704
24 mm Double Glass Glazing Bead

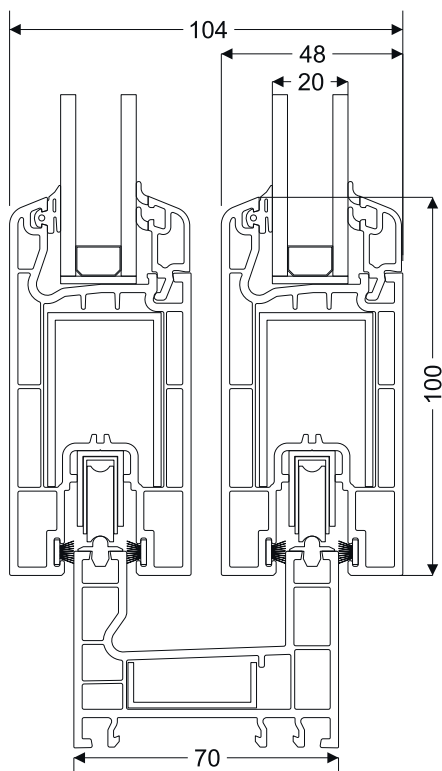


Double Sliding Frame - Sliding Sash

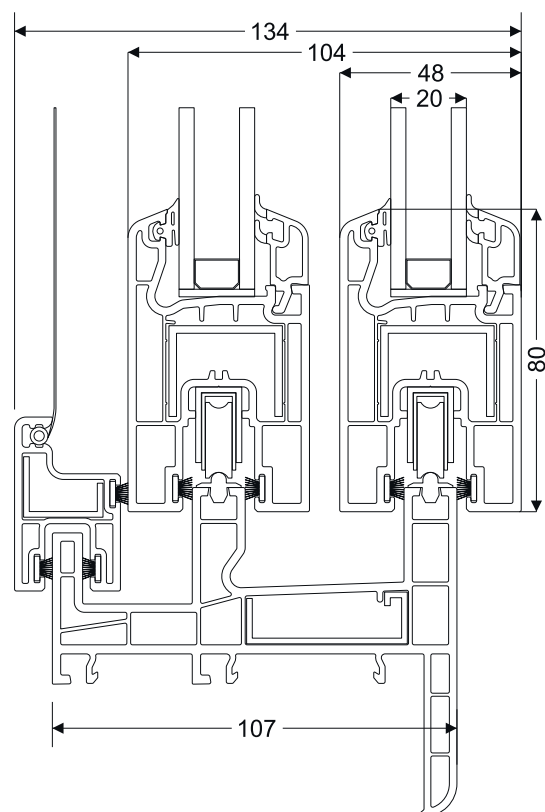

Double Sliding Frame - Sliding Sash with Flynet

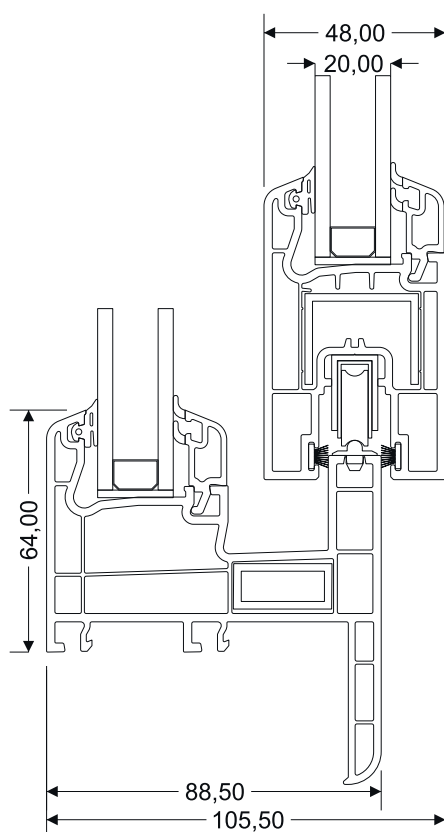

Fixed Sliding Frame - Sliding Sash

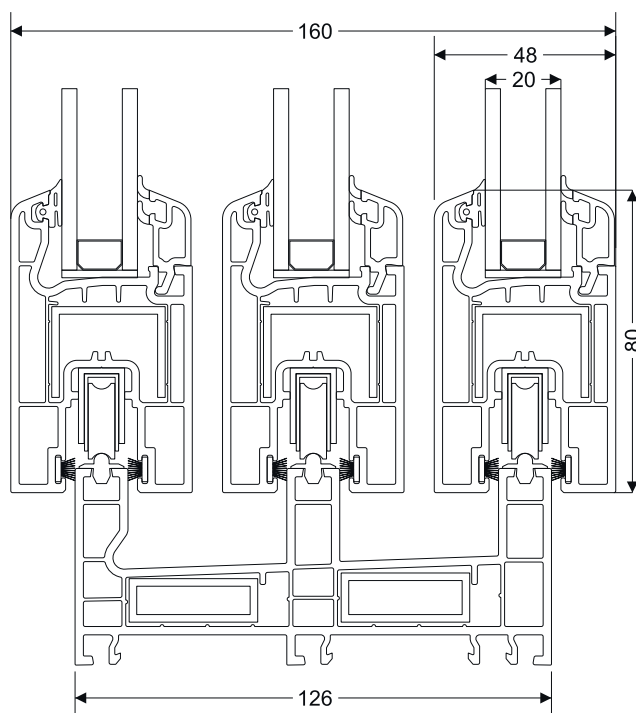

Triple Sliding Frame - Sliding Sash

PROSLIDE-84

84 MM, 3 CHAMBERS


Product Description

It is designed to be used in projects which sliding window and door needed, meanwhile it has a decorative appearance and more elegant design than its counterparts. It adds value to your place. Through to the closed rail ducts, it remain clean for a long time. Produced with TPE gasket and self-gasket provides sealing with corner welds.

1. Two type sash profile W:60mm H:80mm, W:60mm H:100mm
2. 3 Chambered system which improves insulation, durability
3. Decorative glazing bead with PCE gasket
4. External wall with 45° chamfer which prevents dust and dirt, provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standards
7. Between 4mm - 30mm glass application possibility
8. One-type reinforcement steel
9. One-type seal
10. Unlimited lamination color option


Lamination Colors


For more color, please contact with us!




Certificates

All products are under quality management system

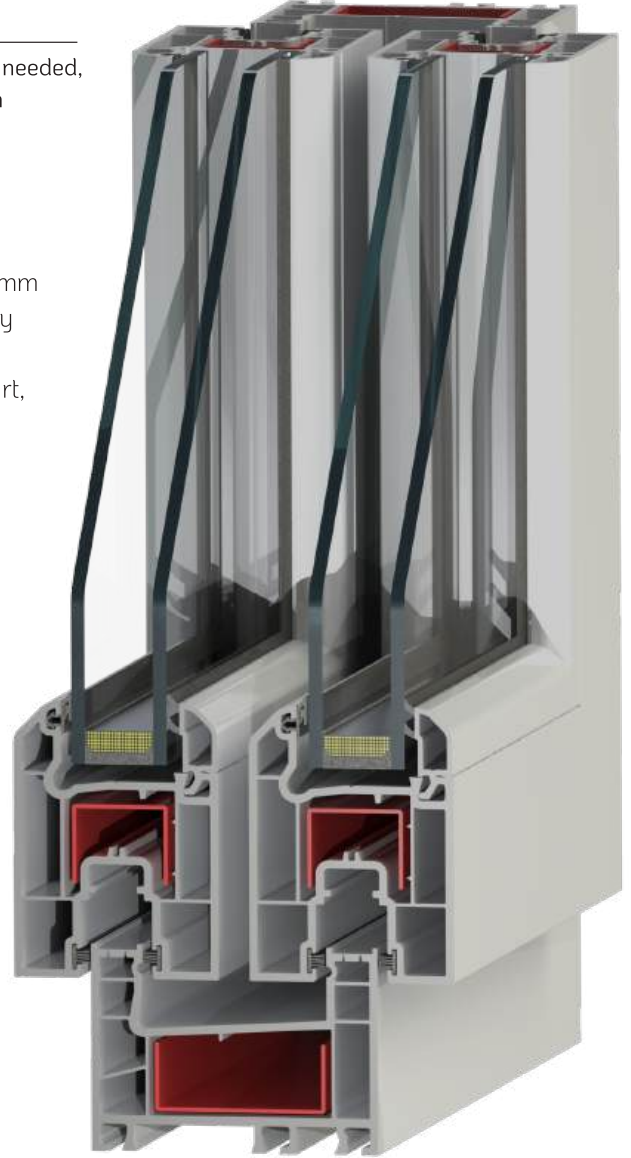


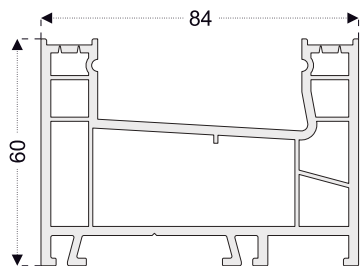


PRO20
Sliding Frame Profile

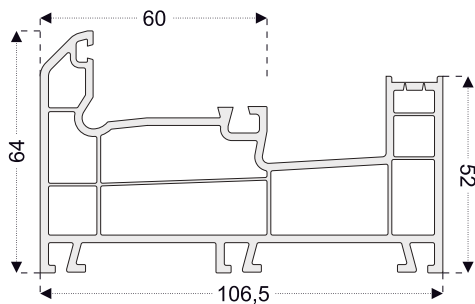


PRO23
Fixed Sliding Frame Profile

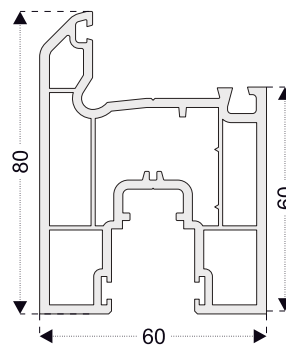


PRO21
Sliding Door Sash Profile

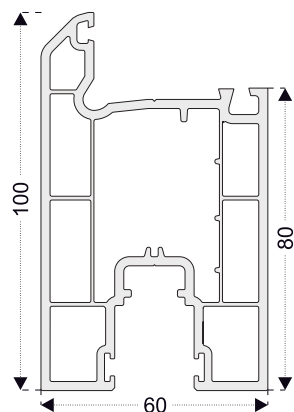


PRO24
Sliding Door Sash Profile

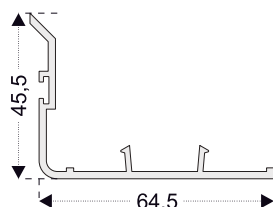


PRO22 ** for PRO21
Sliding Sash Profile Adapter

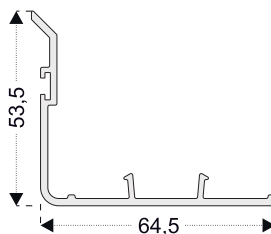

PRO25 ** for PRO24
Sliding Sash Profile Adapter

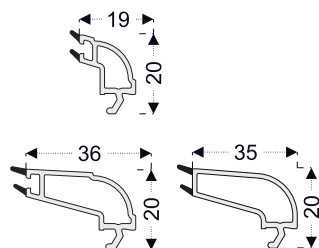


PRO05
20-22 mm Double Glass G.Bead

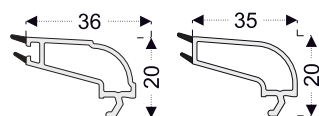


PRO06
4-6 mm Single Glass G.Bead




PRO07
28-30 mm Triple Glass G.Bead




PRO08
24-26 mm Double Glass G.Bead

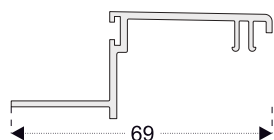

PRO28
Double Sliding Frame
Trim Profile (Alum.)

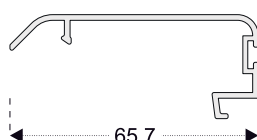


PRO43
Fixed Sliding Frame
Trim Profile (Alum.)




PRO41
Sliding Sash Profile
Locking Plate (Alum.)




PRO27
Sliding Rail Profile
(Alum.)

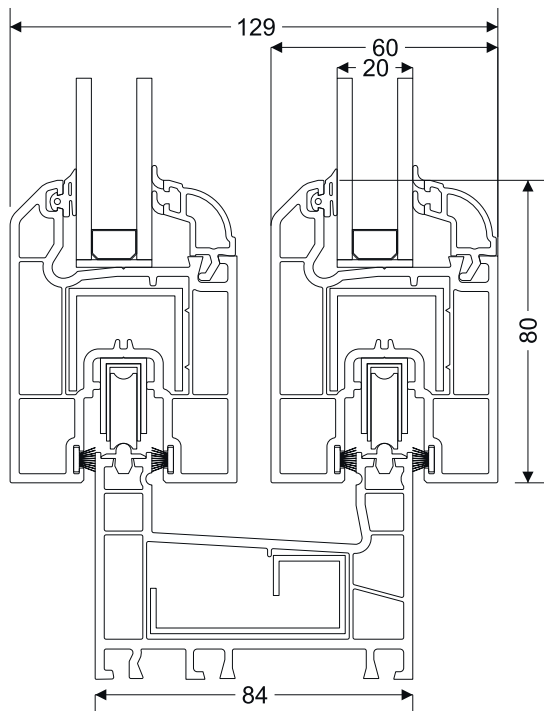

Sliding Frame - Sliding Sash 80mm

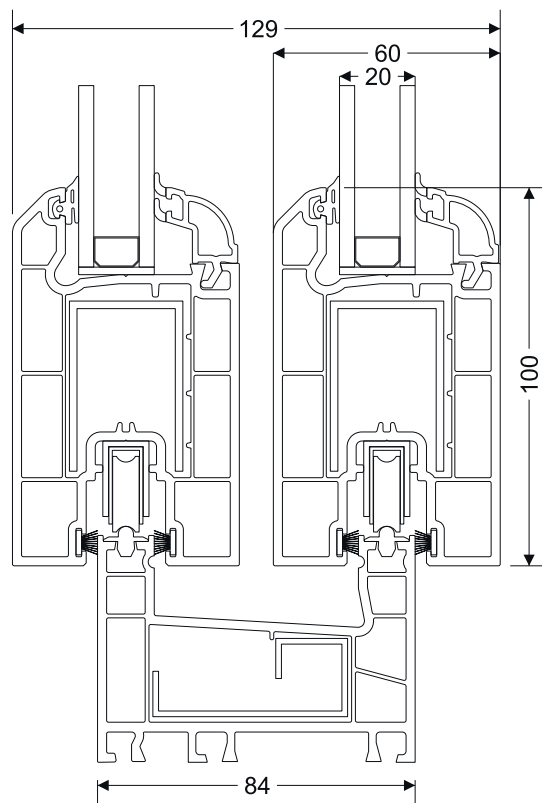

Sliding Frame - Sliding Sash 100mm

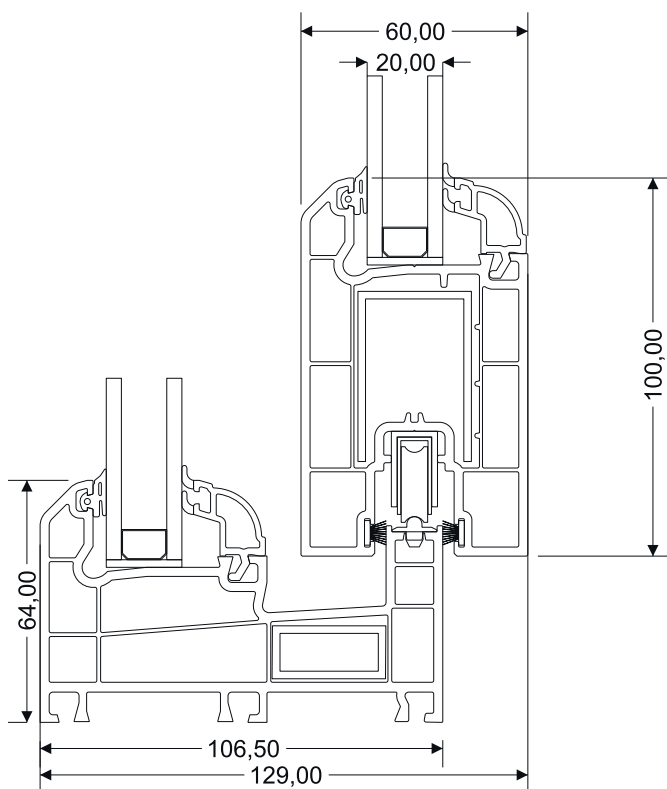

Fixed Sliding Frame - Sliding Sash

PROSLIDE INSULATED SLIDING SYSTEM

140 MM


Product Description

Our insulated sliding system provides excellent sound and heat insulation thanks to its 140 mm wide special frame and the specially developed in European for this system. The Sashes close tightly on the frame with the special in European system, providing high security. It offers a wide and uninterrupted view thanks to its large glass surfaces.

1. 140 mm profile width
2. Decorative glazing bead with PCE gasket
3. Slope which provides maximum water disposal
4. External wall thickness in European Standards
5. Between 4 mm - 36 mm glass application possibility
6. Unlimited lamination color option

Lamination Colors

For more color, please contact with us!



Certificates


All products are under quality management system




PROSLIDE INSULATED SLIDING SYSTEM

140MM




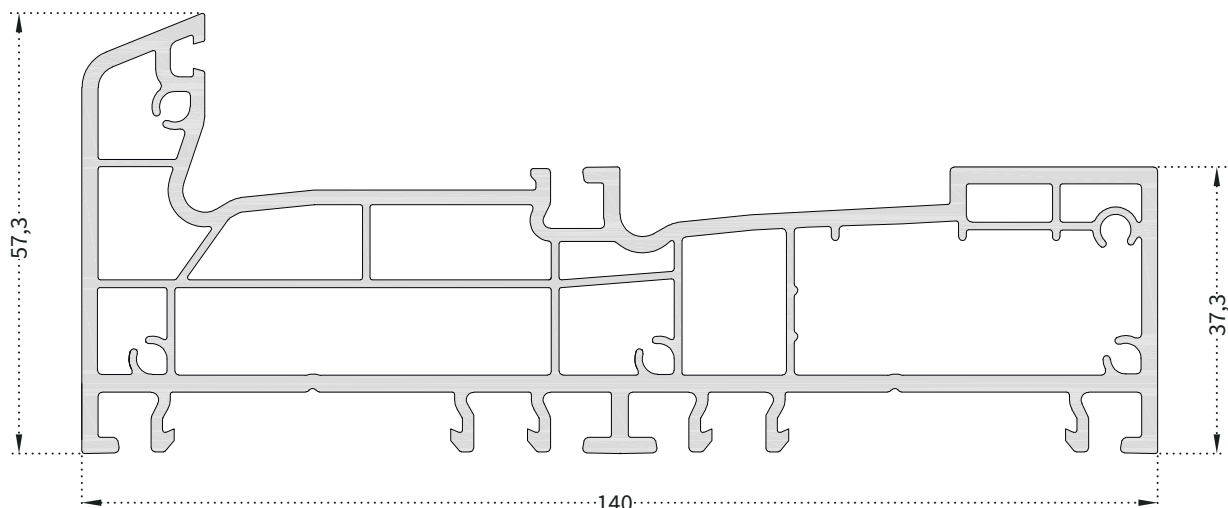


PRO1400
Sliding Frame

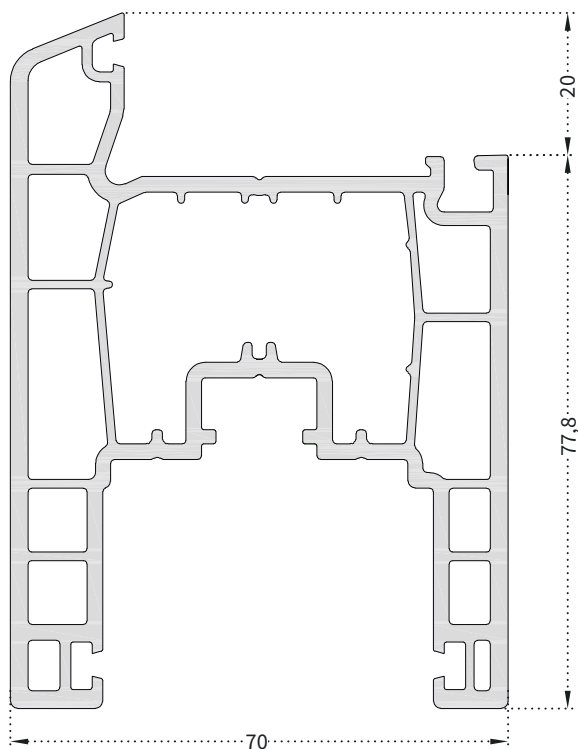


PRO1401
Sliding Sash

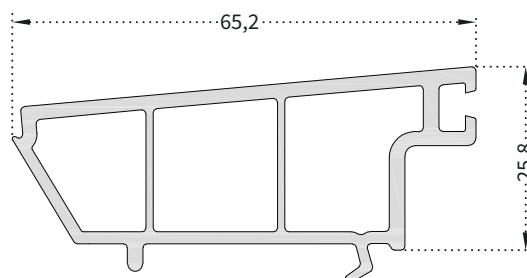


PRO1402
Sliding frame closing profile

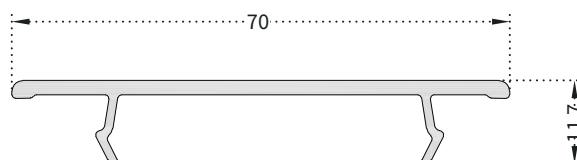


PRO1403
Sliding Sash Profile Adapter

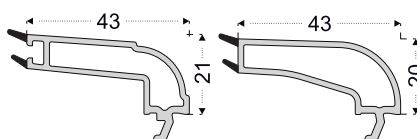


PRO700
4-6 mm Single Glass G.Bead




PRO701
20-22 mm Double Glass G.Bead




PRO702
24-26 mm Double Glass G.Bead



PRO705
32 mm Double Glass G.Bead




PRO706
32 mm Double Glass G.Bead




PRO703
36 mm Double
Glass Glazing Bead

PROSLIDE INSULATED SLIDING SYSTEM



SECTION DETAILS

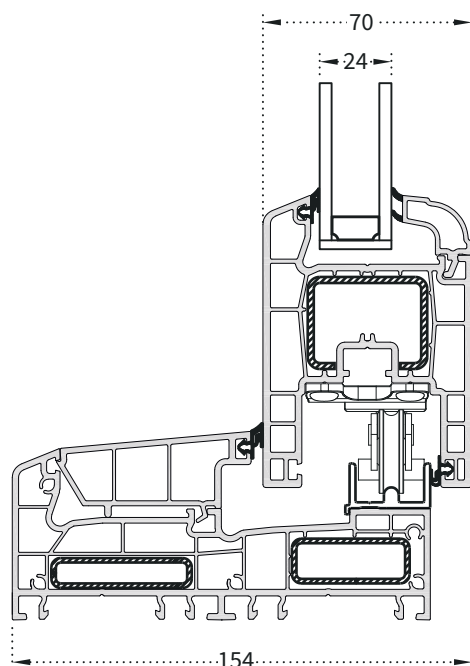




Closed Position

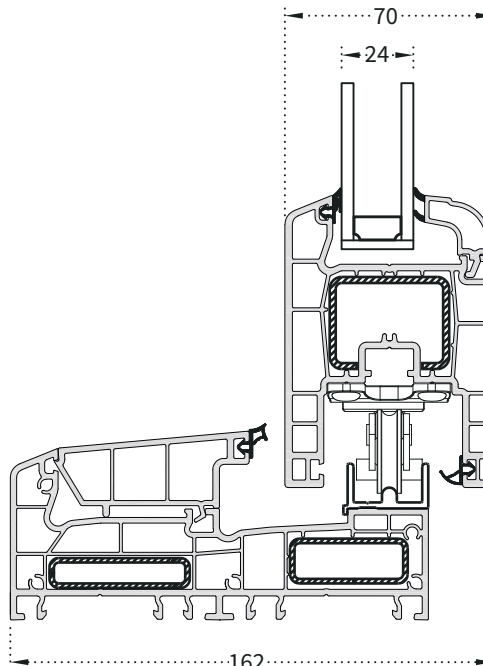


Sliding Position

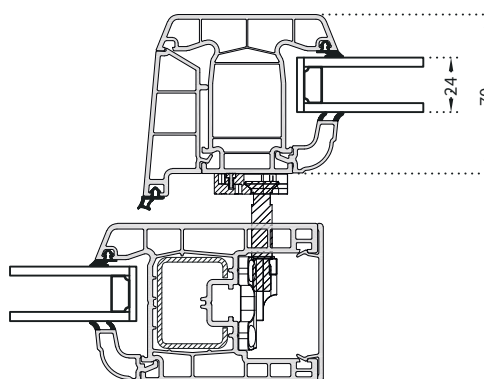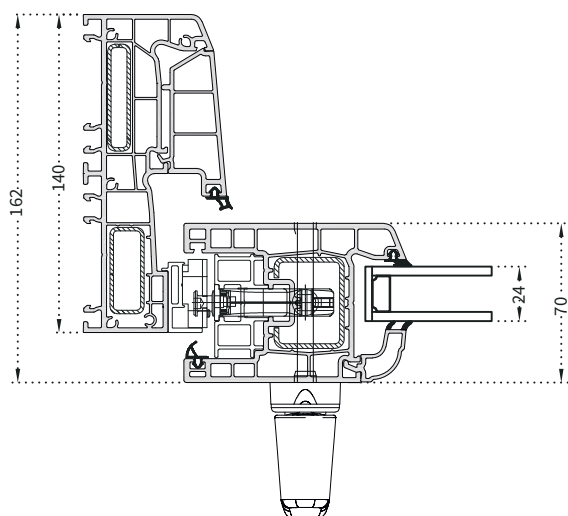

Sliding Position

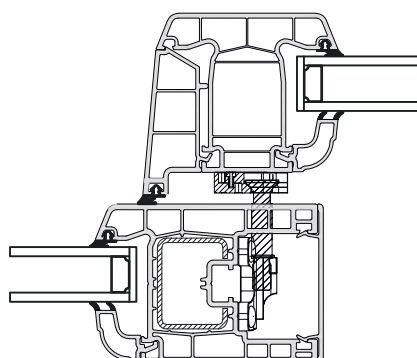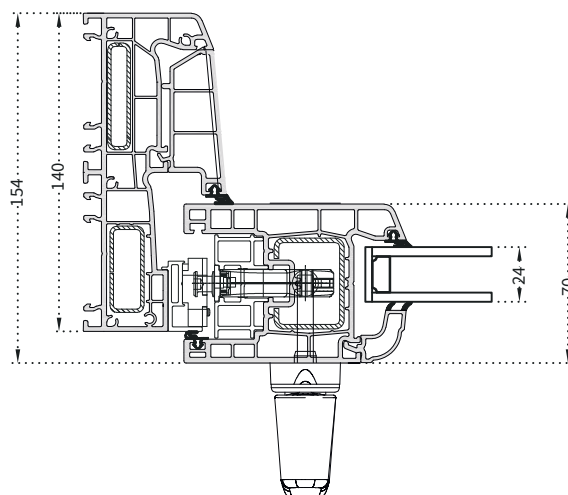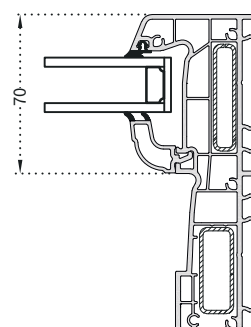


Closed Position

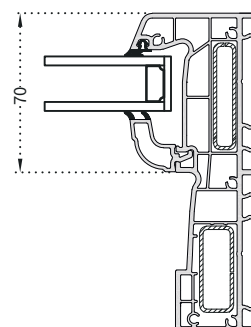


PROSLIDE INSULATED SLIDING SYSTEM


TECHNICAL DRAWINGS

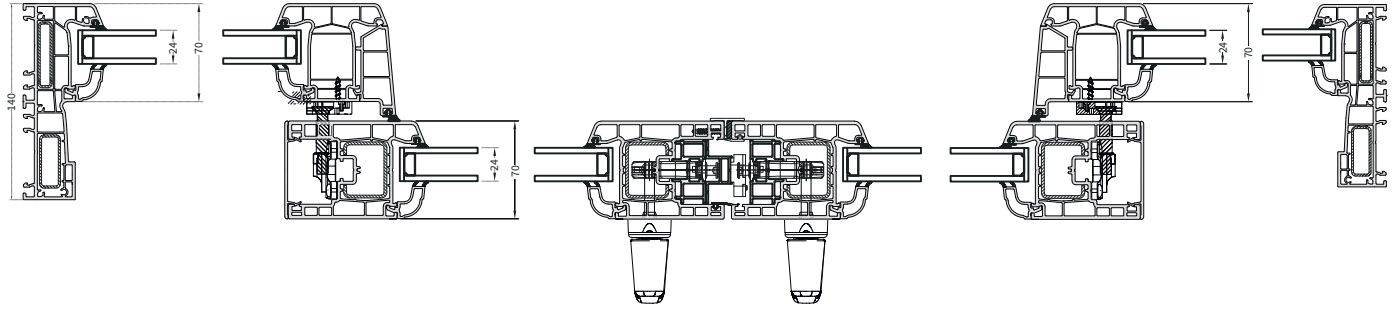


Double Sash Closed Position

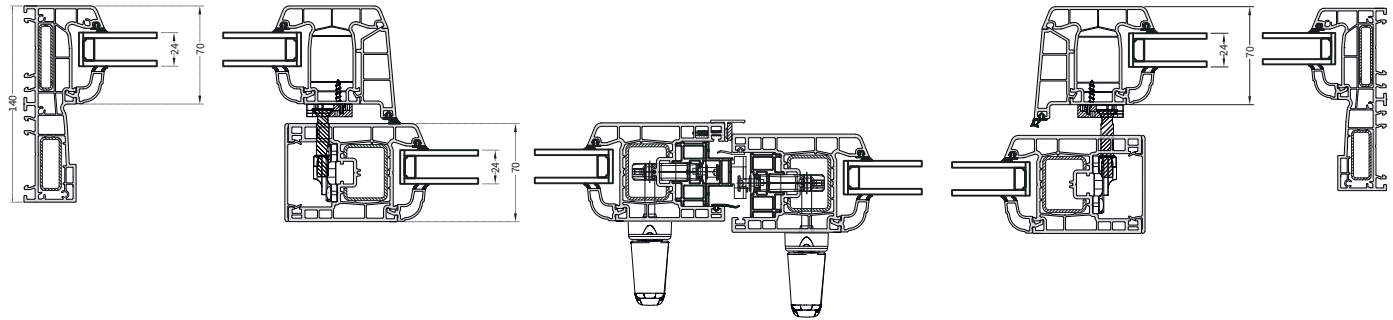

Double Sash Sliding Position

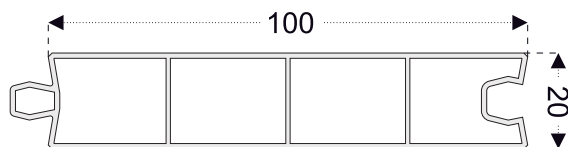


PRO30
Panel (Lambri) Profile

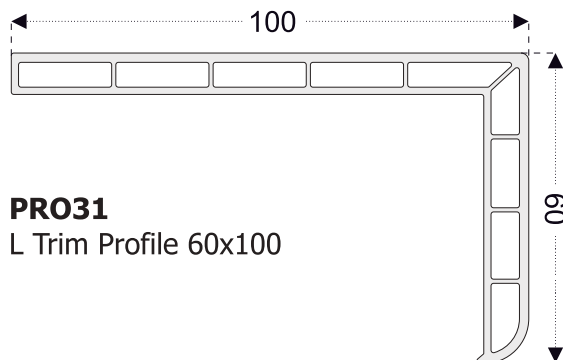


PRO31
L Trim Profile 60x100




PRO31A
L Trim Profile Adapter




PRO32
Corner Turning Pipe
(60-70mm Series)

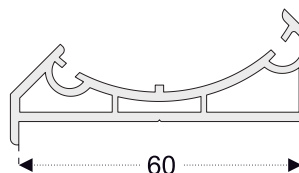


PRO33
Corner Profile - 60mm

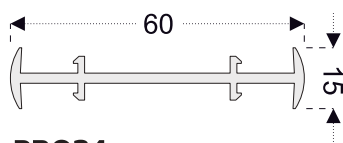


PRO34
Coupling Profile - 60mm

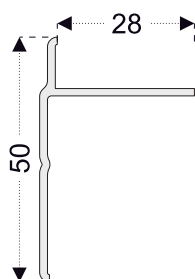


PRO35
T Trim Profile
(60mm Series)

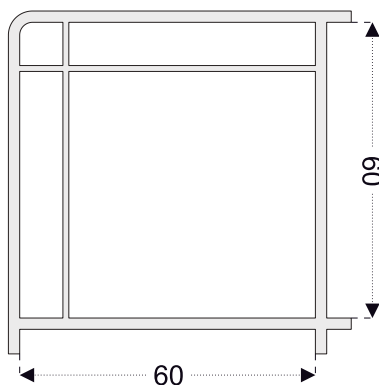


PRO36
Box Profile - 60x60mm
(60mm Series)

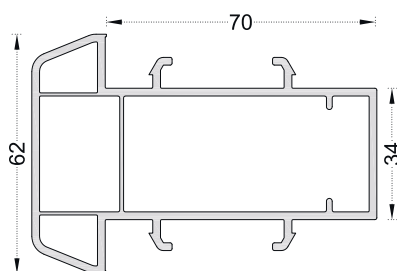

PRO37
Grillage Profile

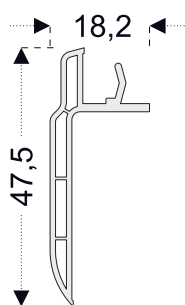


PRO38
Nailed Trim Profile
(60mm Series)

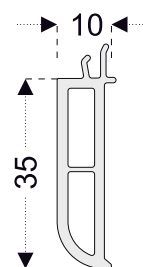


PRO39
Extension Trim Profile
(70mm Series)



PRO40
Coupling Profile


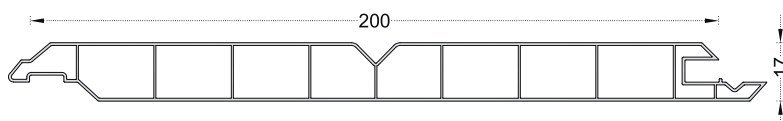


PRO45
Panel (Lambri) Profile 200 mm

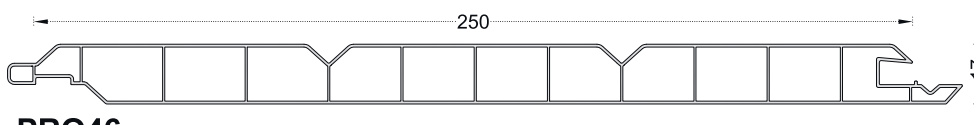


PRO46
Panel (Lambri) Profile 250 mm


PRO75
Window Sill Profile

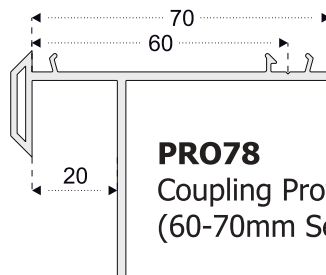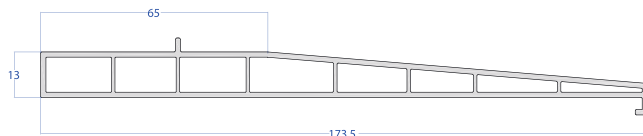


PRO78
Coupling Profile for Wall Panel
(60-70mm Series)

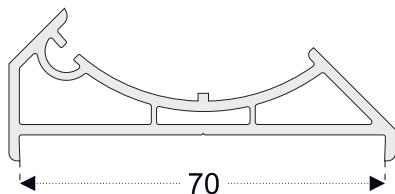


PRO331
Corner Profile - 70mm

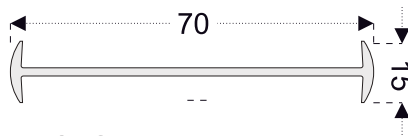


PRO79
Coupling Profile - 70mm

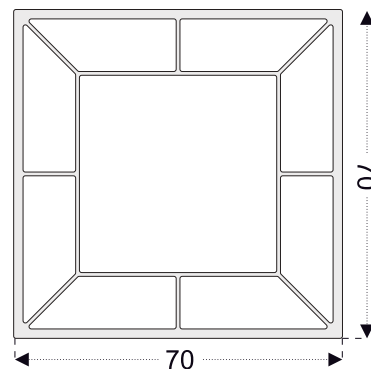


PRO80
Box Profile - 70x70mm
(70mm Series)

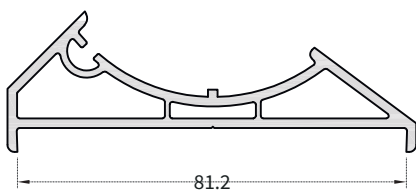

PRO8638
Corner Profile - 81mm

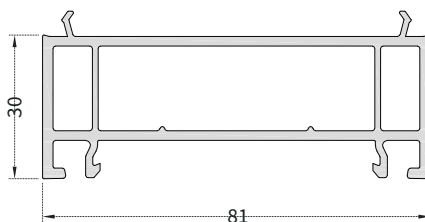

PRO8639
81mm Rising Profile

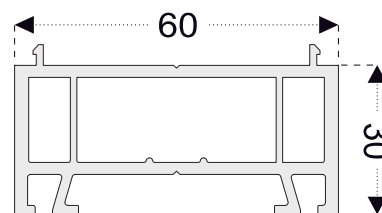


PRO14
Rising Profile - 30mm
(60mm Series)




PRO1003
40mm Flat Strip Profile




PRO1002
60mm Flat Strip Profile



PRO1001
100mm Flat Strip Profile

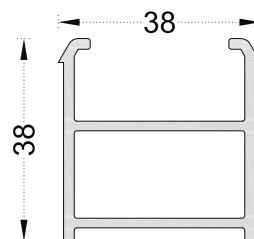


PRO1007
Hidding Rising Profile

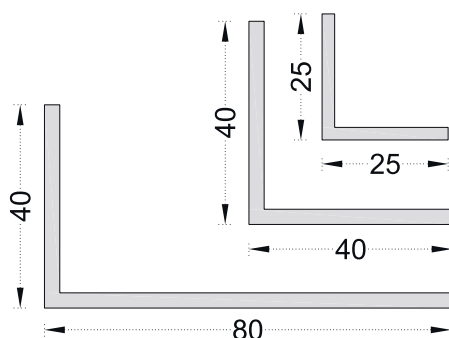

PRO1004
25x25 Corner Profile

PRO1005
40x40 Corner Profile



PRO1006
40x80 Corner Profile

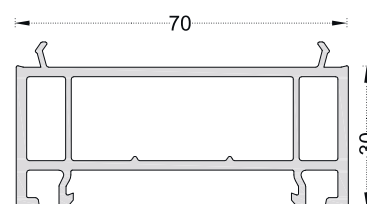

PRO1008
70mm Rising Profile



PRO70

Isolation Profile - 100 mm Wall

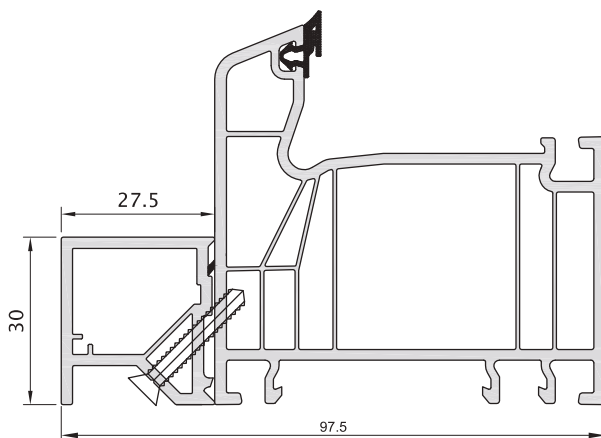



PRO71

Isolation Profile - 120 mm Wall

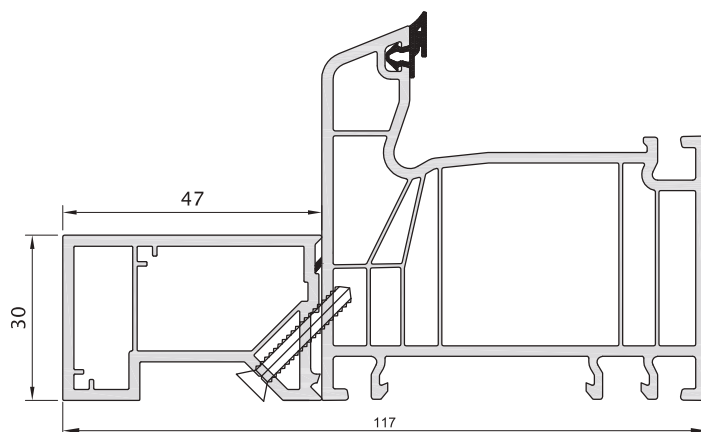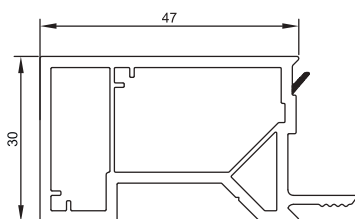

PRO72

Isolation Profile - 140 mm Wall

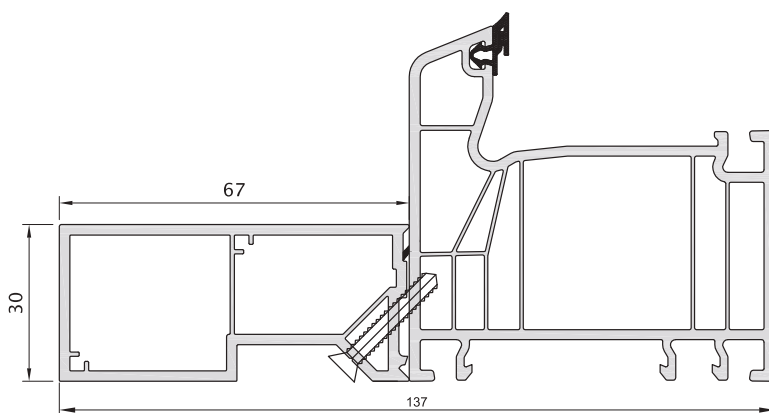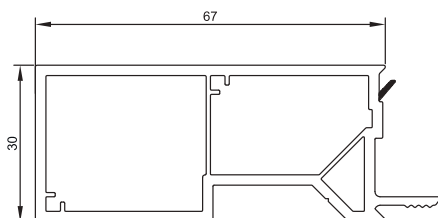



PROLINE PVC PLASTİK ANONİM ŞİRKETİ

Center : Adalet Mah. Manas Blv. Folkart Towers No: 47B İç Kapı
No: 2601 Bayraklı/ İZMİR
Factory : Selvilitepe Osb Mah. Osb 1872. Cad. İdari Bina No:7/1
Turgutlu / MANİSA / TÜRKİYE

Tel : +90 850 441 1900
Fax : +90 232 327 3171
Email : info@prolinepvc.com
Web : www.prolinepvc.com



prolinepvc



proline.pvc



prolinepvc